


1999-2007 F250-350 Ext Cab Rear 40-60 Bottoms/Bench Top Installation



Step 1. Top/T:

Temporarily remove the backrest by lifting up. Place the seat cover on with the long 2" wide hook (sticky) fasteners to the bottom of the seat.

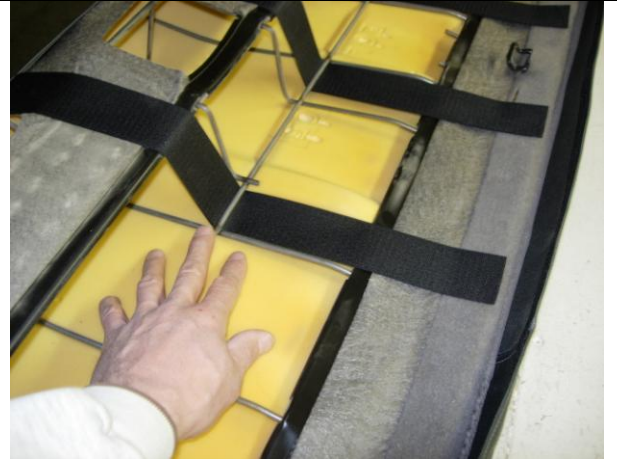

Step 2. Top:

Position the seat cover by lining up the side seams of the seat cover with the seams of your seat, they should closely match. Route the long hook straps under the metal bar and mate them to the carpet on the top back of the seat as shown.



Step 3. Top:

Route the left and right top side loop (fuzzy) fasteners where shown, under the 2" wide hook fastener mating to it and under the metal bar.



Step 4. Top:

Wrap it around the top of the hook fastener and mate it again to the hook fastener back at an angle.



Step 5. Top:
Mate the two left and right bottom side loop fasteners to the long hook fasteners as shown.



Step 6. Top:
Lastly, pull the seat cover down, removing the slack, and mate the hook fastener sewn inside the top edge to the carpet on the top back of the backrest.



Step 7. Passenger Bottom/PB:
Remove the seatbelts from their elastic restraints in the middle of the seat.



Step 8. Driver and Passenger Bottom/DB & PB:
Slide the seat covers on with the extending hook fasteners to the top and the 2" wide loop fastener to the bottom. Tuck the fabric behind the latch and the plastic on the outside edges. With the seat partway up use one hand in a smoothing action from front to back to remove slack from the seat cover, mating the hook fasteners to the loop fastener.