

1981-94 Toyota Regular Cab 4X4 Bench Seat Installation



Step 1.
Temporarily remove the rubber bumpers from the back of the seat using a Phillips screwdriver.



Step 2. Top/T
Both parts of the seat cover are labeled inside. "T" is for top, and "B" is for the bottom. Place the top on with the extending hook fasteners to the front.



Step 3. Top/T
Pull the cover down and form it to the integral headrests.



Step 4. Top/T
Manipulate the seam fabric inside the seat cover from thumb & middle finger to pointer the finger.



Step 5. Top/T
Align the hole and re-install the rubber bumper.



Step 6. Top/T
Tuck the hook fasteners into the seat, routing them under the bar. Use one hand in a smoothing action down the front of the seat from top to bottom, while gently pulling on the fastener with the other hand from behind. Pin it to the seat with the front hand and press the fasteners together. Work from one side to the other.



Step 7. Bottom/B
Feed the seat belts through the provided openings.



Step 8. Bottom/B
Work the fabric inside the seat cover seam outward, or from thumb to forefinger.




Step 9. Bottom/B
Tuck the back edge in.



Step 10. Bottom/B
Route the hook fastener between the seat slide and the seat, just in front of the hinge arm.



Step 11. Bottom/B
Route the rear most side hook fastener behind the hinge arm and route it around the back corner.

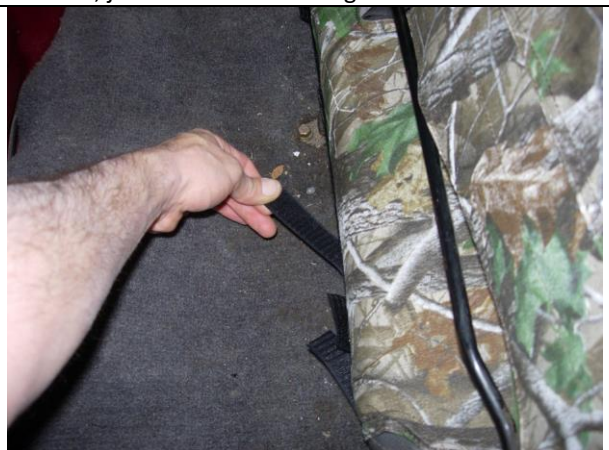

Step 12. Bottom/B
Mate both side hook fasteners to the loop fastener sewn on the back edge at roughly a 45 degree angle.



Step 13. Bottom/B
Slide the seat all the way forward and route the long front hook fasteners under the seat. Mate them to the loop fastener on back. The two center fasteners route easiest along the transmission hump.



Step 14. Bottom/B
Connect the three plastic buckles under the back edge of the seat. One in the middle, one for passenger, and one for the driver side. See step 15 for view.



Step 15. Bottom/B
View of rear buckle.



Step 16. Bottom/B
Fasten the side buckle to the 3" wide metal frame, then back to itself. Trim excess if necessary.