

1987-1991 F-150 Bench Bottom, 50-50 Split Back Installation



Step 1. Bottom/B:
Place the bottom seat cover on with the extending hook (sticky) Velcro™ to the front as shown.



Step 2. Bottom/B:
Fold the beat backs forward one at a time, and pull the backside of the bottom seat cover over the back corner, making sure to run the catch for the seat thru the provided opening.




Step 3. Bottom/B:
Tuck the material under the plastic for the seatbelts.



Step 4. Bottom/B:
Form the corners of the seat cover to the seat by lining up the seams of the seat cover to the seams of the seat, they should match closely.



Step 5. Bottom/B:
Route the front most side Velcro™ where shown and press it to the loop Velcro™ sewn on the back edge.

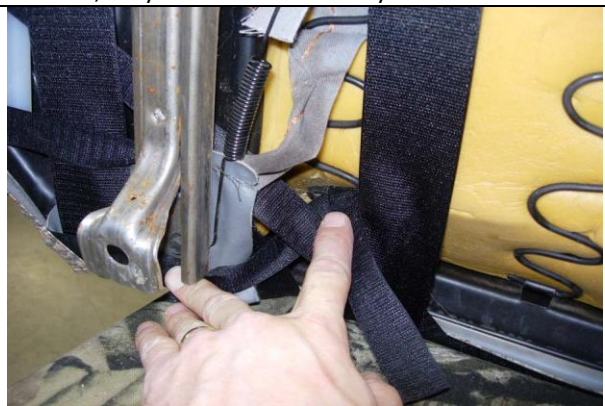

Step 6. Bottom/B:
Route the middle Velcro™ the same as Step 5. The rear most Velcro™ routes behind the seat slide, around the seat support wire, then top the rear loop Velcro™



Step 7. Bottom/B:
Route the front hook Velcro™ under the seat, making sure to keep them above the seat slide wire as shown, and then press them to the rear loop Velcro™.



Step 8. Bottom/B:
Connect the left and right side buckle where shown, connecting it to the metal frame, tighten it, then press the Velcro™ together, trim the excess.



Step 9. Bottom/B:
Connect the plastic buckles that were connected to the rear loop Velcro™ where shown, then press them to the rear loop Velcro™, trim the excess.



Step 10. Driver & Passenger Top/DT & PT:
The driver & passenger tops are labeled inside with "DT & PT". Loosen the screws for the seat release lever, but do not remove.



Step 11. Driver & Passenger Top/DT & PT:
Slide the seat cover on with the extending hook Velcro™ to the front as shown. The cut-out for the lever should be on the outside edge. Tuck the fabric under the top first, then work it around the bottom.



Step 12. Driver & Passenger Top/DT & PT:
Tighten the screws, but be careful to not over tighten the screws and crack the plastic.



Step 13. Driver & Passenger Top/DT & PT:
Form the top corners of the seat cover to the top of the seat, lining up the seams of the seat cover same as Step 4.



Step 14. Driver & Passenger Top/DT & PT:
Again line up the left and right sides of the seat cover.



Step 15. Driver & Passenger Top/DT & PT:
Fold the seat back forward and tuck the Velcro™ through to the backside. Use one hand in a smoothing action down the front of the seat cover from top to bottom while gently pulling on the Velcro™ with the other hand from behind, then connect the Velcro™.



Step 16. Driver & Passenger Top/DT & PT:
Make sure when connecting the outside edge Velcro™ to keep the opening for the seat release open as shown.