

1992-1994 Chevy/GMC Ext Cab Rear Bench Installation




Step 1. Top/T:

The seat cover top and bottom are labeled inside the seat cover on the right front corner. "T" for top & "B" for the bottom. Tip the backrest forward and slide the Top on with the extending hook Velcro™ to the front. Turn the back of the cover inside out so the hook Velcro™ doesn't catch when you pull it down.




Step 2. Top/T:

Once the seat cover is pulled all the way down, align the seams of the seat cover to the seams of your seat on the left and right, they should closely match. Tuck the front edge in and fold the backrest flat. Pull tight and connect the hook Velcro™ to the carpet on the seat, starting on one side working to the other side.

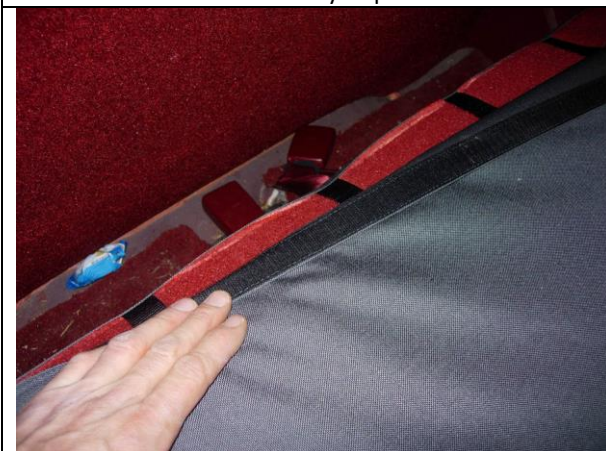

Step 3. Top/T:

Pull the back edge down and connect the hook Velcro to the carpet, starting on one side working to the other. Fold the seat up and see how it looks. Reconnect the Velcro™ for the best fit.

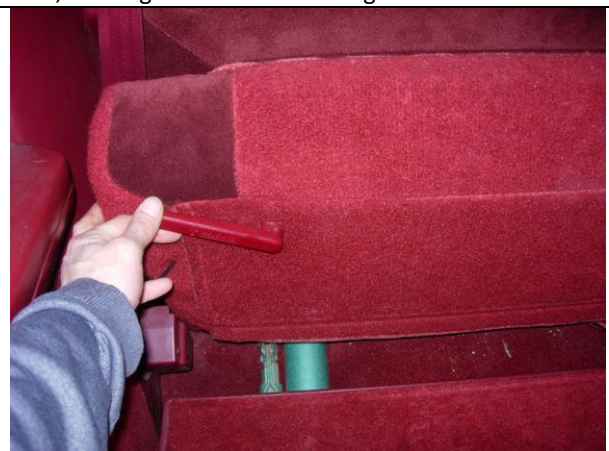

Step 4. Bottom/B:

Pull the lever under the passenger side and lift the seat bottom partway up.



Step 5

Slide the seat cover Bottom over the passenger side with the extending hook Velcro™ to the top side and the hole for the lever on bottom. Feed the lever thru first, then pull the cover all the way down.



Step 6.

Slide the cover down into position, and like Step 2, align the seams of the seat cover to the seams of the seat. Like Step 2 pull tight the Velcro and connect it to the carpet on the seat bottom, starting on one side, moving to the other.



Step 7.

Pull the bottom side down and connect the Velcro to the carpet same as Step 3.