

1992-1996 Jeep Wrangler Bucket Seat Installation



Step 1. Driver & Passenger Top/DT&PT:
All the parts of the seat cover are labeled on the inside right front corner. Use the Seat Cover Part Identification Chart to ID parts. Slide the seat cover on with the extending hook Velcro™ to the front.



Step 2. Driver & Passenger Top/DT&PT:
Form the top of the seat cover to the top of the seat. Line up the seams of the seat cover to the seams of your seat, they should match closely.



Step 3. Driver & Passenger Top/DT&PT:
Tuck the Velcro™ in and tip the seat forward.



Step 4. Driver & Passenger Top/DT&PT:
Tuck the fabric behind the lever for the seat release.



Step 5. Driver & Passenger Top/DT&PT:
Use one hand in a smoothing action down the front of the seat from top to bottom while gently pulling on the Velcro™ from the backside, tuck it under and press the Velcro™ together.



Step 6. Driver & Passenger Bottom/DB&PB:
Place the seat cover on with the extending hook Velcro™ to the front as shown.




Step 7. Driver & Passenger Bottom/DB&PB:
Tuck the seat cover behind the plastic cowling on the outside edge.



Step 8. Driver & Passenger Bottom/DB&PB:
Again, line up the seams of the seat cover to the seams on your seat, they should closely match.



Step 9. Driver & Passenger Bottom/DB&PB:
Tuck the back edge in.

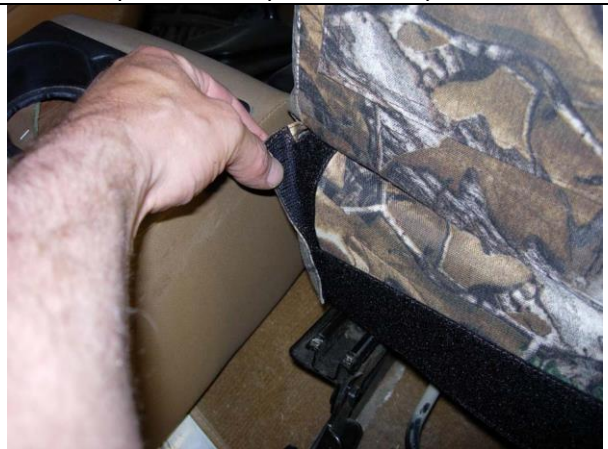

Step 10. Driver & Passenger Bottom/DB&PB:
Pull the material on the inside edge around to the back and press the Velcro™ together as shown.



Step 11. Driver & Passenger Bottom/DB&PB:
Slide the inside edge hook Velcro™ where shown, between the seat slide and the seat.



Step 12. Driver & Passenger Bottom/DB&PB:
Likewise with the long outside edge hook Velcro™, route it between the seat and seat slide as shown.



Step 13. Driver & Passenger Bottom/DB&PB:
Carefully feel under the seat for the Velcro™, pull them tight and press them to the loop Velcro™ sewn on the back edge at an angle, trim the excess Velcro™.



Step 14. Driver & Passenger Bottom/DB&PB:
Route the long hook Velcro™ from the front edge to the back, pressing it onto the loop Velcro sewn on top of the back edge of the seat cover. Slide your hand from front to back in a smoothing action while pulling on the back edge of the seat cover to tighten it up, then re-connect the Velcro™, trim the excess.



Step 15. Driver & Passenger Bottom/DB&PB:
View from under the back edge of the seat bottom. Force the plastic buckle thru the foam and connect it to a seat support wire, then back to the loop Velcro™ sewn on the back edge, trim the excess.