

1994-1998 Ford 40/20/40 Installation



Step 1. Console/C:

All the parts of the seat covers are labeled inside. Use the "Seat Cover Piece Identification Chart" to ID parts. Tuck the front of the cover behind the plastic as shown.



Step 2. Console/C:

Tuck the sides of the cover behind the plastic using a flat tool like a stiff feeler gauge.



Step 3. Console/C:

The end of the fabric with the extending hook (sticky) fastener should be here.



Step 4. Console/C:

Clean the surface of the plastic below the lid with rubbing alcohol by scrubbing it with a soaked cloth and wipe it dry while it's still wet to remove the residue.



Step 5. Console/C:

Peel the backing off from the adhesive hook fastener and stick it to the plastic as shown.



Step 6. Console/C:

Mate the loop fastener sewn inside the back edge of the cover to the adhesive hook fastener and the extending hook fasteners from the sides as shown.




Step 7. Middle Bottom/MB:

Place the seat cover on with the long hook fasteners to the front.



Step 8. Middle Bottom/MB:

Tuck the material on the sides between the seat belt and the seat.

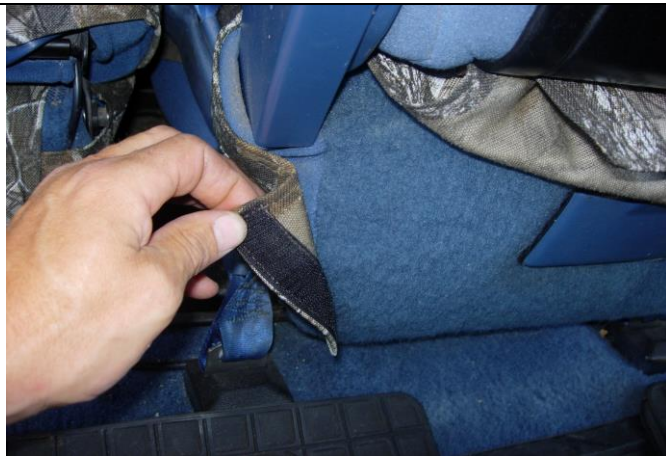

Step 9. Middle Bottom/MB:

Pull the material on the sides around to the back and mate them to the carpet on the seat.



Step 10. Middle Bottom/MB:

Route the side hook fasteners in front of the seatbelt at an angle and mate it to the carpet on the back edge of the seat as shown.



Step 11. Middle Bottom/MB:

Pull the back edge of the seat cover down and mate the hook strip sewn inside the back edge to the carpet.



Step 12. Driver & Passenger Tops/DT&PT:

Slide the seat covers on with the long hook fasteners to the front. Line up the seams of the seat cover to the seams of the seat, they should closely match.



Step 13. Driver & Passenger Tops/DT&PT:

Use your hands to smooth the seat cover working from the top to the bottom. Work the fabric inside the seat cover to the middle of the seat (pointer finger). Tuck the hook fasteners into the seat and mate them to the loop fastener in back by using one hand in a smoothing action down the front of the seat from top to bottom while gently pulling on the fastener from behind, and then tuck it under and mate it.



Step 14. Driver & Passenger Bottoms/DB&PB:

Place the seat cover on with the long hook fasteners to the front. Note how the fabric of the seam is away from the main body of the seat cover.



Step 15. Driver & Passenger Bottoms/DB&PB:

Fold the sides of the seat cover down around the seat and continue to work the fabric outward from the inside (pointer finger) of the seam to the outside edge.



Step 16. Driver & Passenger Bottoms/DB&PB:

Tuck the back edge of the seat cover in and pull it back into position. Line up the seams of the seat cover to the seams of your seat, they should closely match.



Step 17. Driver & Passenger Bottoms/DB&PB:

View from behind the driver seat next to the middle bottom. Pull the inside part of the seat cover next to the middle bottom, back and mate the hook fastener to carpet on the back of the seat.



Step 18. Driver & Passenger Bottoms/DB&PB:

Slide the seat all the way forward and route the inside hook fastener through the gap between the seat slide and the seat and mate it to the carpet on the back edge of the seat.



Step 19. Driver & Passenger Bottoms/DB&PB:
Tuck the fabric of the seat cover behind the plastic cowl on the outside edge of the seat.



Step 20. Driver & Passenger Bottoms/DB&PB:
Tuck the outside edge hook strap behind the recline lever and angle it to the back.



Step 21. Driver & Passenger Bottoms/DB&PB:
Route the outside strap around the back corner of the seat where shown and mate it the carpet on the seat.



Step 22. Driver & Passenger Bottoms/DB&PB:
View from behind the driver seat. Mate the hook fasteners to the carpet as shown.



Step 14. Driver & Passenger Bottoms/DB&PB:
Lastly, mate the hook fastener sewn inside the back edge by pulling it back and pressing it onto the carpet on the back edge of the seat.



Congratulations, you're done, enjoy your seat cover. They take some effort to get on, but once they're on they will stay put and give you several years of use. Thanks for the business! Paul