

1994-1998 Ford F-250-550 40/20/40 Installation



Step 1. Console/C:

All of the parts of the seat cover are labeled inside. Use the seat cover piece identification chart to ID parts. Tuck the front of the cover behind the plastic as shown.



Step 2. Console/C:

Tuck the sides of the cover behind the plastic using a flat tool.



Step 3. Console/C:

The end of the fabric with the extending hook (sticky) Velcro™ should be here.



Step 4. Console/C:

Clean the surface of the plastic below the lid with rubbing alcohol by scrubbing it with a soaked cloth and wipe it dry while it's still wet to remove the residue.



Step 5. Console/C:

Peel the backing off from the adhesive hook Velcro™ and stick it to the plastic as shown.



Step 6. Console/C:


Mate the loop Velcro™ sewn inside the back edge of the cover to the adhesive hook Velcro™ and the extending hook Velcro™ as shown.



Step 7. Middle Bottom/MB:
Place the seat cover on with the long hook Velcro™ to the front.



Step 8. Middle Bottom/MB:
Tuck the side flap between the seat belt and the seat.

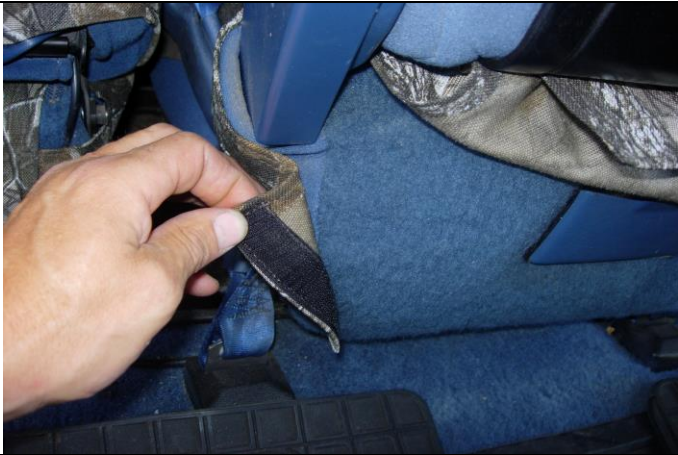

Step 9. Middle Bottom/MB:
Pull the side flaps around to the back and press them to the carpet on the seat.



Step 10. Middle Bottom/MB:
Route the side Velcro™ in front of the seat belt at an angle and connect them to the carpet on the back edge of the seat as shown.



Step 11. Middle Bottom/MB:
Pull the back edge of the seat cover down and press the hook Velcro™ sewn inside the back edge to the carpet as shown.



Step 12. Driver & Passenger Tops/DT&PT:
Slide the seat covers on with the hook Velcro™ to the front.



Step 13. Driver & Passenger Tops/DT&PT:

Use your hands to smooth the seat cover working from the top to the bottom. Work the fabric from the seam inside the seat cover from the front side and the back side of the seat to the middle (pointer finger). This will make a wrinkle free seam.




Step 14. Driver & Passenger Bottoms/DB&PB:

Place the seat cover on with the long Velcro™ to the front. Note how the fabric of the seam is away from the main body of the seat cover.



Step 15. Driver & Passenger Bottoms/DB&PB:

Fold the sides of the seat cover down around the seat and continue to work the fabric from the inside (pointer finger) of the seam to the outside edge.

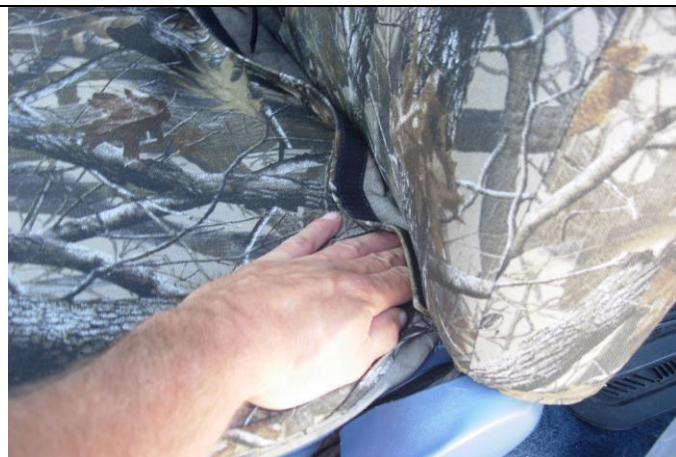

Step 16. Driver & Passenger Bottoms/DB&PB:

Tuck the back edge of the seat cover in and pull it back into position. Position it by lining up the seams of the seat cover to the seams of your seat.



Step 17. Driver & Passenger Bottoms/DB&PB:

View from behind the driver seat next to the middle bottom. Pull the inside flap of the seat cover back and press the hook Velcro™ to carpet on the back of the seat.



Step 18. Driver & Passenger Bottoms/DB&PB:

Slide the seat forward and route the inside hook Velcro™ through the gap between the seat slide and the seat and connect it to the carpet on the back edge of the seat.



Step 19. Driver & Passenger Bottoms/DB&PB:
Tuck the fabric of the seat cover behind the plastic on the outside edge of the seat.



Step 20. Driver & Passenger Bottoms/DB&PB:
Tuck the Velcro™ behind the recline lever and angle it to the back.



Step 21. Driver & Passenger Bottoms/DB&PB:
Route the outside Velcro™ around the back corner where shown and press it to the carpet on the seat.



Step 22. Driver & Passenger Bottoms/DB&PB:
View from behind the driver seat. Press the Velcro™ to the carpet as shown.



Step 21. Driver & Passenger Bottoms/DB&PB:
Lastly, press the Velcro™ sewn inside the back edge by pulling it back and pressing it onto the carpet on the back edge of the seat.



Congratulations, enjoy your seat cover. They take some effort to get on, but once they are installed properly they will stay put and give you several years of use.