

1994-1998 F-250-550 Bucket Installation



Step 1. Driver and Passenger Tops/DT&PT:

The parts of the seat covers are labeled inside. Use the "Seat Cover Piece Identification Chart" to identify the parts. Slide the seat cover on with the long hook (sticky) straps to the front and the cut-out for the armrest to the inside.




Step 2. Driver and Passenger Tops/DT&PT:

Work the access lever through the provided opening behind the seat. Line up the seams of the seat cover to the seams of your seat, they should closely match.



Step 3. Driver and Passenger Tops/DT&PT:

Mate the fasteners under the armrest starting under the armrest and work your way down as shown.

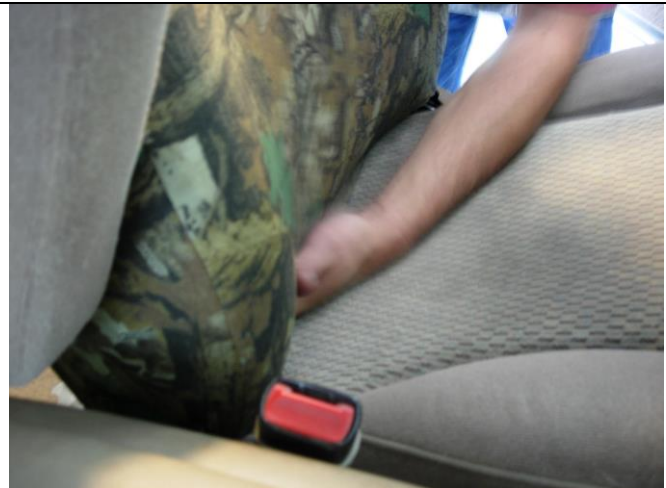

Step 4. Driver and Passenger Tops/DT&PT:

Tuck the hook fasteners into the seat and mate them to the loop fastener sewn in back. Do this by using one hand in a smoothing action down the front of the seat from top to bottom while gently pulling on the fasteners from behind, and then tucking it under the back edge and mating it.



Step 5. Driver and Passenger Bottoms/DB&PB:
Place the seat covers on with the long hook straps to the front and the long flap of material (right hand) to the inside.



Step 6. Driver and Passenger Bottoms/DB&PB:
Tuck the material of the seat cover behind the plastic cowling in front. Route the long hook straps under the seat and mate them to the carpet on the back edge of the seat.



Step 7. Driver and Passenger Bottoms/DB&PB:
Slide the long outside edge hook strap between the seat and the plastic. Route the strap between the recline lever and the lumbar knob.



Step 8. Driver and Passenger Bottoms/DB&PB:
Pull the strap through to the bottom of the plastic and tuck the fabric behind the plastic cowling.



Step 9. Driver and Passenger Bottoms/DB&PB:
Route the outside edge hook fastener between the seat slide and the seat as shown and mate it to the carpet on the back edge of the seat.



Step 10. Driver and Passenger Bottoms/DB&PB:
Pull the inside of the edge of the seat around to the back of the seat and mate it to the carpet on the back edge of the seat. The flap is on the right side of the photo. Route the long inside hook strap around the back inside corner of the seat, mating it to the carpet.



Step 13. Driver and Passenger Armrests/DA&PA:
Slide the cover on with the cut out towards the seat.



Step 14. Driver and Passenger Armrests/DA&PA:
Work the armrest cover on all the way using both hands from top to bottom.



Step 15. Driver and Passenger Armrests/DA&PA:
Mate the fasteners at the back of the armrest covers as shown.



Step 16. Lid/L: Mate the fasteners under the lid as shown. Note: The lid cover was modified and looks different than the picture. The hook fasteners in front extend and mate to the rear fasteners.