

1994-97 Ranger 60-40 W/ opening Console Installation



Step 1. Driver & Passenger Top/DT&PT:
Slide the seat covers on with the extending hook (sticky) Velcro™ to the front. Turn the back of the seat cover inside out as shown in Step 2.



Step 2. Driver & Passenger Top/DT&PT:
Keep the backside Velcro™ turned inside out and pull the cover as far down as possible.



Step 3. Driver & Passenger Top/DT&PT:
Form the seat cover to the top of the seat, manipulating the seat cover material inside from thumb to forefinger.



Step 4. Passenger Top/PT:
Tuck the front edge in and feed the hook Velcro™ thru to the backside. Use one hand in a smoothing action down the front of the seat cover from top to bottom while gently pulling on the extending hook Velcro™ on the backside with the other hand. Once pulled tight, press the front hook Velcro™ to the carpet on the backside of the seat. Lastly, pull down on the back edge of the seat cover and press the hook Velcro™ sewn inside the back edge to the carpet on the backside of the backrest.



Step 5. Driver Top/DT:

Push the extra material from the right side of the Driver's side under the bracket for the console thru to the back, pull it tight and press the hook Velcro™ to the carpet on the backside of the seat.



Step 6. Driver Top/DT:

Lastly, pull the back edge down, and press the hook Velcro™ to the carpet on the backside of the backrest, same as Step 4.



Step 7. Driver & Passenger Bottom/DB&PB:

Place the seat covers on with the long hook Velcro™ to the front.



Step 8. Driver & Passenger Bottom/DB&PB:

Tuck the back edge of the seat cover in to help hold the cover in position.



Step 9. Driver & Passenger Bottom/DB&PB:

Tuck the outside edge behind the black plastic as shown.



Step 10. Driver & Passenger Bottom/DB&PB:

Form the seat cover to the seat by lining up the seams of the seat cover to the seams of the seat, they should match closely. Be sure to have the seat cover pulled far enough back in order to line up the front seam.



Step 11. Driver & Passenger Bottom/DB&PB:
Push the inside edge Velcro™ down between the seats.



Step 12. Driver & Passenger Bottom/DB&PB:
Use your hand to guide the Velcro™ between the seat and seat slide. Carefully feel for it under the seat, and route it back to the back edge. Pull it tight and press it to the loop Velcro™ sewn on the back edge.



Step 13. Passenger Bottom/PB:
Remove the Phillips screws that hold on the plastic cowling and set it aside.



Step 14. Passenger Bottom/PB:
Route the outside edge Velcro™ where shown, then carefully feel for it under the seat. Pull it tight and connect it to the loop Velcro™ sewn on the back edge.



Step 15. Passenger Bottom/PB:
Pull the side Velcro™ tight and press it to the loop Velcro™ sewn on the back edge of the seat cover.



Step 16. Driver & Passenger Bottom/DB&PB:
Fold the long front hook Velcro™ in half lengthwise with the sticky facing in. This will stiffen the Velcro™ up and make it easier to route to the back edge.



Step 17. Driver & Passenger Bottom/DB&PB:
Pull the back edge of the seat cover tight, and press the hook Velcro™ to the loop Velcro™ sewn on the back edge.




Step 18. Passenger Bottom/PB:
Pull the inside edge of the seat cover back and press it to the loop Velcro™ sewn on the back edge.



Step 19. Driver & Passenger Bottom/DB&PB:
Disconnect the side Velcro™, pull them tight, then re-connect it.



Step 20. Driver Bottom/DB:
Remove the seat belts from behind the console from their elastic webbing.

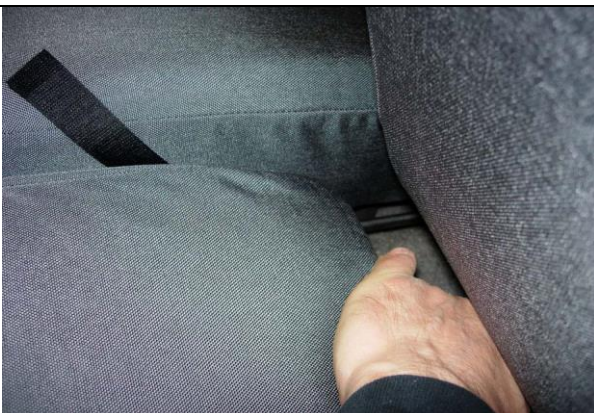

Step 21. Driver Bottom/DB:
Tuck the back corner of the seat cover under the console.



Step 22. Driver Bottom/DB:
Route the outside edge hook Velcro™ above the seat slide where shown.



Step 23. Lid/L:

Fold the console down and place the cover on with the letter "L" marked on the inside to the back.



Step 24. Lid/L:

Pull the cover tight, then press the hook Velcro™ to the fuzz under the lid as shown.



Step 25. Console/C:

With the console up, slide the cover on with the letter "C" marked inside to the bottom.



Step 26. Console/C:

Pull the cover up to the edge of the opening.



Step 27. Console/C:

Fold the Velcro into the box and note the areas where they will lay. Clean the areas with rubbing alcohol by scrubbing it hard, then wiping it off while it's still wet.



Step 28. Console/C:

Pull the cover up to the edge, and peel the backing off of the adhesive Velcro™ and press them into the plastic. Re-clean the areas if they're not sticking.