

# 1994-98 Dodge Quad cab rear installation




## Step 1. Bottom/B:

The pieces of the seat cover are labeled inside. Use the "Seat Cover Piece Identification Chart" to identify the pieces. Slide the front seats all the way front and tilt the backrests forward. Feel under the right or left side of the seat bottom for the lever and fold the bottom up into the backrest. Temporarily remove the handles from each side with a Phillips screwdriver as shown.



## Step 2. Bottom/B:

Slide the seat cover on with the holes for the levers to the bottom. It helps to keep the underside of the cover folded back to keep the hook (sticky) Velcro™ from catching the carpet on the seat (shown).

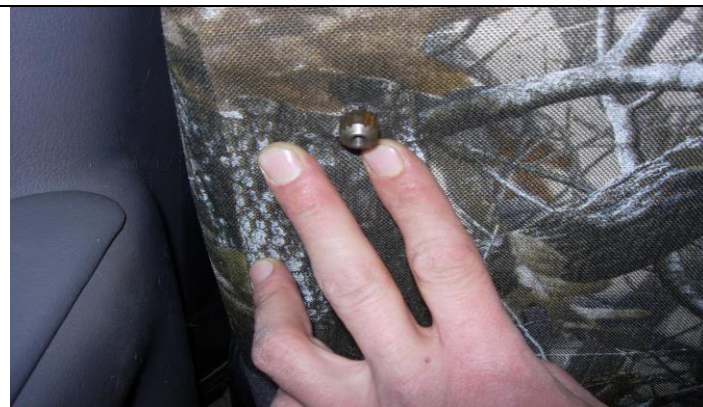

## Step 3. Bottom/B:

Line up the holes for the levers and put the handles back on.



## Step 4. Bottom/B:

Tuck the seat cover into the seat and press the hook Velcro™ sewn inside the seat cover to the carpet on the back and bottom of the seat. Some repositioning of the Velcro™ may be necessary to smooth out any wrinkles.



## Step 5. Top/T:

Lift the seat bottom up to pull the top of the seat away from the back of the cab. Slide the seat cover over the top of the seat. Tuck the hook Velcro™ into the seat, around to the side, connecting it to the loop Velcro™ sewn in the side of the seat cover.



Enjoy the seat cover. A properly installed seat cover will remain in place with out the need to move it back into place.