

1997-2000 F-150 40/60 w/ Single Cup Installation



Step 1. Driver and Passenger Top/DT&PT:

All the parts of the seat cover are labeled inside the cover. Use the Seat Cover Piece Identification Chart to ID parts. Slide the seat covers on with the extending hook (sticky) Velcro™ to the front. Form the top of the seat cover to the seat. The seams of the seat covers should closely line up with the seams of your seat. Work the fabric seams inside the seat cover outward (from light grey to dark grey).



Step 2. Driver and Passenger Tops/DT&PT:

For Super Cab and Regular Cab models, tuck the fabric around the access lever behind the seat.



Step 3. Driver and Passenger Tops/DT&PT:

Tuck the hook Velcro™ into the seat and mate them to the loop (fuzzy) Velcro™ sewn inside the back edge. Do this by gently pulling on the Velcro™ from behind the seat with one hand and use the other hand in a smoothing action from the top to the bottom of the seat, connecting the Velcro™ at the bottom.



Step 4. Driver Bottom/DB:

Place the seat covers on with the long hook Velcro™ to the front. Again, the seams of the seat cover should closely line up with the seams of your seat. Work the seams of the fabric outward (from light grey to dark grey). Connect the long front hook Velcro™ to the carpet on the front of the seat under your knees, routing them under the seat and pressing them to the carpet on the back edge of the seat.



Step 5. Driver Bottom/DB:
Pull the inside edge back and press the hook Velcro™ to the carpet on the seat as shown.



Step 6. Driver Bottom/DB:
Slide the long outside edge hook Velcro™ down between the seat and the plastic. Loosening the screw behind the recline lever helps.



Step 7. Driver Bottom/DB:
For models with electric controls, lift the seat all the way up towards the ceiling. Carefully reach under the seat and feel for the Velcro™. Route it where shown, on top of the metal frame and press it to the carpet on the back of the seat. For models with manual controls, route it straight back inside the plastic and mate it where you see the plastic wrapping around the back of the seat (left side of the photo) Move the seat to make sure the seat action is not impeded by the Velcro™.



Step 8. Driver Bottom/DB:
Lastly, pull the back edge of the seat cover back and press the hook Velcro™ to the carpet, starting on one side moving to the other. Some repositioning of the Velcro™ may be needed to get the best fit. Gently slide the seat back and forth to make sure the Velcro™ are not impeding the seats actions. Re-route the Velcro™ as needed.



Step 9. Passenger Bottom/PB:
Remove the center seatbelt on the inside edge of the seat from its elastic restraint.



Step 10. Passenger Bottom/PB:
Place the seat cover on with the long hook Velcro™ to the front. Feed the seatbelts through the provided opening.



Step 11. Passenger Bottom/PB:
Pull the seat cover over the inside rear part of the seat below the console. Put the center seatbelt through the elastic restraint sewn to the seat cover. Press the hook Velcro™ sewn on the inside edge to the carpet on the seat.



Step 12. Passenger Bottom/PB:
Place the seat covers on with the long hook Velcro™ to the front. Again, the seams of the seat cover should closely line up with the seams of your seat. Work the seams of the fabric outward (from light grey to dark grey). Press the long front hook Velcro™ to the carpet on the front of the seat under your knees, routing them under the seat and mate them to the carpet on the back edge of the seat. Slide the long outside edge hook Velcro™ between the seat and the plastic. Loosen screw as in Step 6.



Step 13. Passenger Bottom/PB:
Pull the hook Velcro™ down through to the bottom of the plastic.



Step 14. Passenger Bottom/PB:
Pull the Velcro™ straight back inside the plastic cowl and press it to the carpet on the seat, routing it to the right or outside of the seat slide. Move the seat to make sure the seat's action is not impeded.




Step 15. Passenger Bottom/PB:

Fasten the seat cover to the carpet behind the console. Pull the small piece of seat cover next to the seatbelt cut-out, between the console and passenger backrest and fasten it to the carpet on the back of the seat. Press the remaining back edge of the seat cover to the carpet.




Step 16. Lid/L:

Place the lid cover on with the letter "L" inside the cover to the back. Slide the rear Velcro™ into the hinge using a sawing motion while moving the lid up and down, connecting them to the Velcro™ on the front edge. Connect the side to side Velcro™ last.

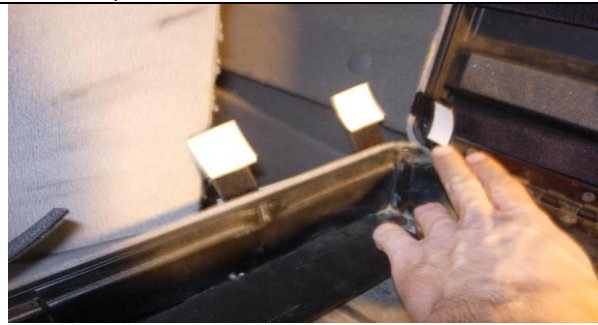

Step 17. Console/C:

Empty the contents of the console but don't clean it with any kind of auto protectant. To give you plenty of room, recline the driver and passenger seat, and slide them forward. With the console in the up position slide the cover over the front. While holding the front with one hand, tuck the cover around the hinge area. Moving it a little will help in tucking it in. Now, fold the console down and pull the back edge up to meet the hinge for the lid. Then, slide the two ½"X3" loop Velcro™ in the back into the left and right side of the hinge in a sawing motion while moving the lid back and forth. Pull the material up flush with the opening of the console.

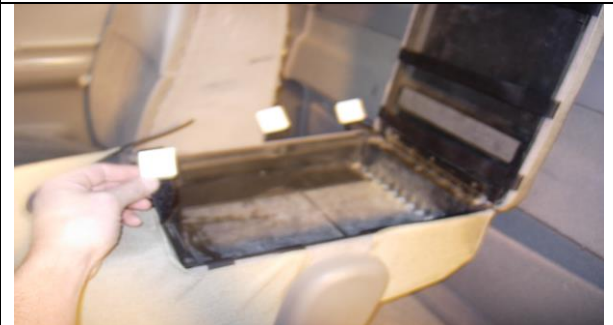

Step 18. Console/C:

Note the areas where the Velcro™ will lay inside the plastic box. Clean the areas with rubbing alcohol and a paper towel. Do this by applying a liberal amount of rubbing alcohol to the towel and scrubbing the plastic hard and then quickly wiping it dry, don't let it air dry. Make sure the cover is positioned correctly before attaching any adhesive tabs. Put the 1"X1" adhesive hook tab at the end of the loop Velcro™ and peel off the backing. Fold it to the inside of the cavity and press down hard. All tabs should be on the inside of the plastic box and not on top. Start at the front and work your way to the back.