

## 1999-2004 Dakota 40-20-40 w/ Opening Console Installation



### Step 1. Driver & Passenger Top/DT&PT:

All the parts of the seat cover are written on the inside right front corner. Use the Seat Cover Part ID Chart to identify the parts. Slide the cover on with the extending hook Velcro™ to the front as shown.



### Step 2. Driver & Passenger Top/DT&PT:

Form the top of the seat cover to the top of the seat. Line up the seams of the seat cover to the seams on the seat, they should match closely.



### Step 3. Driver & Passenger Top/DT&PT:

Tuck the hook (sticky) Velcro™ into the seat



### Step 4. Driver & Passenger Top/DT&PT:

Gently pull on the hook Velcro™ from behind the seat with one hand while using the other hand in a smoothing action down the front of the seat from top to bottom, tightening and smoothing out the seat cover. Use the front hand to pin the Velcro™ and seat cover material to the seat, then press the loop Velcro™ sewn inside the back edge to the hook Velcro™.



**Step 5. Driver & Passenger Bottom/DB&PB:**  
Slide the seat cover on with the long hook Velcro™ to the front as shown.



**Step 6. Driver & Passenger Bottom/DB&PB:**  
Form the seat cover to the front of the seat, again lining up the seams of the seat cover to the seams of the seat. Make sure the seat cover is pulled far enough back, then tuck the back edge in a bit just to hold the seat cover in position.



**Step 7. Driver & Passenger Bottom/DB&PB:**  
With the front seam lined up, press the hook Velcro™



**Step 8. Driver & Passenger Bottom/DB&PB:**  
Pull the outside edge of the fabric back and press it to the fuzz on the back edge of the seat. Next, sweep your hand along the outside edge of the seat cover, work it across the front, then back next to the middle bottom, then grab the inside edge of the seat cover (just like the picture) and pull it back hard and press the Velcro™ to the fuzz.





**Step 9. Driver & Passenger Bottom/DB&PB:**  
Making sure to line up the front seam, then press the hook Velcro™ onto the carpet fuzz under the front of the seat.



**Step 10. Driver & Passenger Bottom/DB&PB:**  
Route the long hook Velcro under the seat and press it to the carpet on the back of the seat bottom as shown.



**Step 11. Driver & Passenger Bottom/DB&PB:**  
Route the outside edge Velcro™ over the top of the seat slide as shown. The inside edge Velcro™ routes the same way.



**Step 12. Driver & Passenger Bottom/DB&PB:**  
Pull the side Velcro™ tight and press them onto the back edge of the seat in a crossing manner forming an "X" as shown. Disconnect the left & right side of the seat cover, pull them back tight and press them back onto the fuzzy back side of the seat bottom.



**Step 13. Driver & Passenger Bottom/DB&PB:**  
Pull the back edge down and press it to the fuzzy backside of the seat bottom as shown.



**Step 14. Middle Bottom/MB:**  
Remove the seatbelts from the elastic webbing.






**Step 15. Middle Bottom/MB:**  
Turn the front of the cover inside out for now.



**Step 16. Middle Bottom/MB:**  
Tuck the back edge in.

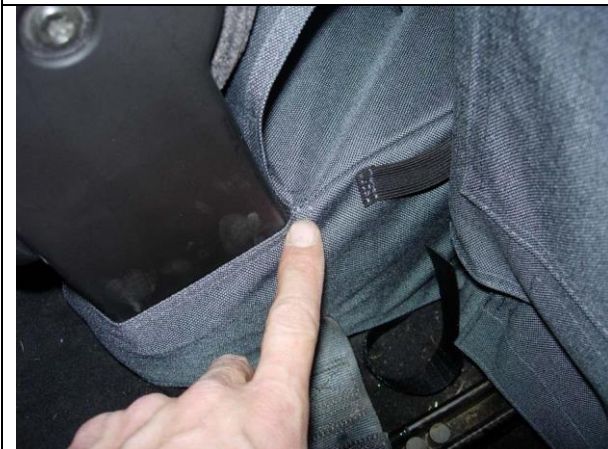

**Step 17. Middle Bottom/MB:**  
Pull the left and right sides back and press them to the carpet on the back edge of the seat. Pull both sides back equally so the material stops where shown.



**Step 18. Middle Bottom/MB:**  
Roll the front of the cover over and press the hook Velcro™ to the carpet on the front of the middle bottom.



**Step 19. Middle Bottom/MB:**  
Fold the side Velcro™ in half lengthwise with the sticky facing in. Poke it thru to the backside.



**Step 20. Middle Bottom/MB:**  
Pull the side Velcro around to the back at an angle, and press it to the carpet as shown





**Step 21. Middle Bottom/MB:**

Lastly, pull the back edge down and press it to the carpet.



**Step 22. Console/C:**

Lift the console up and place the cover on, tucking in the left and right side behind the plastic for the hinges.



**Step 23. Console/C:**

Fold the Velcro™ into the box and see where it'll lay.




**Step 24. Console/C:**

Clean those areas with rubbing alcohol by scrubbing hard, then wiping dry while it's still wet.



**Step 25. Console/C:**

Peel off the adhesive backing and press the Velcro™ hard into the plastic. If they're not sticking, re-clean the areas.

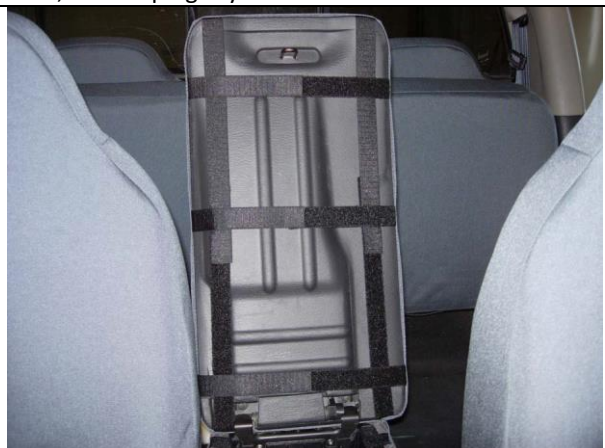

**Step 26. Lid/L:**

Carefully take apart the Velcro™ under the lid. Fold the console down. Place the lid cover on with the Part ID "L" to the back right. Connect the Velcro™ under the lid as shown.