

2003-06 Jeep Wrangler Bucket Seat Installation



Step 1. Driver & Passenger Bottom/DB&PB:

All the parts of the seat cover are labeled inside the cover. Use the seat cover piece identification chart to ID parts. Slide the seat covers on with the long hook Velcro™ to the front, and feed the seat belt through the provided opening.



Step 2. Driver & Passenger Bottom/DB&PB:

Feed the recline lever through the provided opening. Line up the seams of the cover to the seams of your seats upholstery, they should match closely. Tuck the back edge of the seat cover in, but don't stick it to the carpet yet.



Step 3. Driver & Passenger Bottom/DB&PB:

Pull the outside piece of material back and mate it to the carpet on the back edge of the seat, aligning the opening for the recline lever.



Step 4. Driver & Passenger Bottom/DB&PB:

Route the long outside edge hook Velcro™ over the seat slide (below the recline lever).



Step 5. Driver & Passenger Bottom/DB&PB:

Route the side Velcro™ at a 45 degree angle, fastening it to the carpet on the back edge of the seat.



Step 6. Driver & Passenger Bottom/DB&PB:

Pull the inside piece of material around to the back and stick it to the carpet.



Step 7. Driver & Passenger Bottom/DB&PB:
Free the small inside edge Velcro™ from the carpet, smoothing the side of the cover, then pressing them onto the carpet on the side of the seat.



Step 8. Driver & Passenger Bottom/DB&PB:
Route the three long front hook Velcro™ under the front of the seat, avoiding the seat mechanisms as shown.



Step 9. Driver & Passenger Bottom/DB&PB:
Again, check the seat cover for alignment of the seams as in Step 2. Pull the Velcro™ back and mate it to the carpet on the seat. Adjust cover and Velcro™ in Step 10, left, right, back, or front aligning the seams for the best fit.



Step 10. Driver & Passenger Bottom/DB&PB:
Pull the back of the seat cover down and stick the hook Velcro™ to the carpet on the seat. Do it by using one hand in a smoothing action from front to back while pulling on the back of the cover, tightening the cover. Work on one side to the other.



Step 11. Driver & Passenger Top/DT&PT:
Slide the top on with DT & PT labels to the front. Fold the back and inside edge of the seat cover inside out so the Velcro™ doesn't stick yet. Pull the cover down 1/2 way.



Step 12. Driver & Passenger Top/DT&PT:
Form the seat cover to the integral headrests, lining up the seams of the cover to the seams of the seat as in Step 2.



Step 13. Driver & Passenger Top/DT&PT:
Loosen the screws in the plastic panel with a Phillips screw driver, and tuck the fabric behind the plastic. Align the cover, then retighten the screws.



Step 14. Driver & Passenger Top/DT&PT:
Line up the seams as in Step 2, and tuck in the front edge Velcro.




Step 15. Driver & Passenger Top/DT&PT:
Use one hand in a smoothing action down the front of the seat cover while pulling on the bottom edge, then press the Velcro onto the carpet under the front of the seat. Work from one side to the other, smoothing as you go.



Step 16. Driver & Passenger Top/DT&PT:
Pull the inside edge of the seat down and mate the Velcro™ to the carpet on the side of the seat.



Step 17. Driver & Passenger Top/DT&PT:
Lastly, pull the back edge of the seat cover down and press the Velcro™ onto the carpet on the seat back.

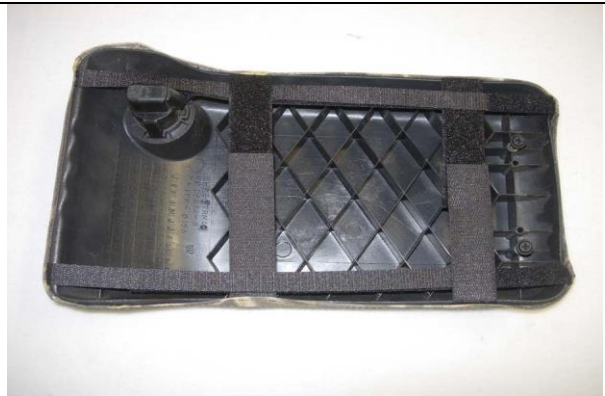

Step 18. Lid/L:
Mate the Velcro™ under the lid. Removal of the lid is not necessary, but could be helpful.



Step 19. Driver & Passenger Visors/DV&PV:
Removal of the visor rod assembly from the Jeep is not required. Gently pull the visor off of the metal rod.



Step 20. Driver & Passenger Visors/DV&PV:
Slide the cover on, lining up the seams as in Step 2, and close in the end with the Velcro™.



Step 21. Driver & Passenger Visors/DV&PV:
Slide the Visor back onto the rod through the provided opening in the cover.



Congratulations, you're done!
Your seat covers should stay in place, giving you several years of use, no matter how tough you are on them.