

# 2004-2009 Dodge 1500-3500 Quad cab 40-60 Rear Installation



## Step 1. Driver and Passenger Tops/DT&PT:

Lift up on the seat bottoms to move the headrests away from the back window. Lift the headrests all the way up, and then with one hand holding gentle upward pressure, push the release button until the headrest comes out.




## Step 2. Driver and Passenger Tops/DT&PT:

All the parts of the seat cover are labeled inside. Use the seat cover piece identification chart to ID parts. With the seat bottoms tilted slightly up, tuck the seat cover under the plastic for the headrests. You can use a box to help hold the seat up.



## Step 3. Driver and Passenger Tops/DT&PT:

Press the hook Velcro™ to the carpet that is behind the top of the seat.

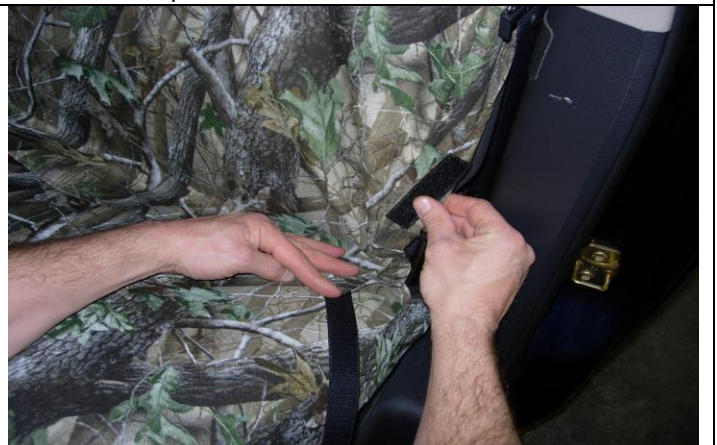

## Step 4. Driver & Passenger Tops/DT&PT:

With the seat bottom up, route the extending hook Velcro™ on the left and right side, under the seat, to the side of the seat, connecting them to the loop Velcro™ sewn in the side of the seat cover.



## Step 5. Driver and Passenger Bottoms:

Tilt the seat bottoms up slightly and slide the cover on with "PB" and "DB" up. Mate the hook Velcro™ to the carpet on the bottom of the seat.



## Step 6. Headrests/H:

Slide the headrest covers on with the hook Velcro™ to the front. Connect them to the loop Velcro™ sewn inside the back edge. Re-install the headrests back into the seat.