

2007-13 Tundra Buckets Fold Flat Passenger Installation



Step 1. Driver/DT: Temporarily remove the elastic straps from the underside of the seat.



Step 2. Driver Top/DT:
The elastic straps are connected to the seat bottom by the white plastic hooks shown in the photo.



Step 3. Driver & Passenger Top/DT&PT:
Temporarily remove the headrests by gently lifting up while depressing the push button release as shown.



Step 4. Driver & Passenger Bottoms/DB&PB:
All the parts of the seat cover are labeled inside. Use the seat cover piece identification chart to ID parts.
Place the seat cover on with the long hook (sticky) Velcro™ to the front. Driver only: open the outside edge Velcro™ by the lumbar knob.



Step 5. Driver & Passenger Bottoms/DB&PB:
Tuck the fabric behind the plastic cowling in front.



Step 6. Driver's Bottom/DB:
Connect the Velcro™ under the lumbar knob, skip this step if no knob exists.



Step 7. Driver & Passenger Bottoms/DB&PB:
Continue tucking the fabric behind the plastic cowling. Tuck the back edge of the seat cover into the seat. Line up the seams of the seat cover should to the seams of your seat, they should closely match.



Step 8. Driver & Passenger Bottoms/DB&PB:
View from the outside edge of the driver seat. Use your fingers to push the seat cushion away from the plastic cowling. Route the long outside edge hook Velcro™ exactly where shown in front of the plastic nub shown inside the cowling.



Step 9. Driver & Passenger Bottoms/DB&PB:
Use caution while reaching under the seat to avoid being cut by sharp metal framework. Route the outside edge hook Velcro™ through the gap where shown and press it to the rear loop (fuzzy) Velcro™ sewn to the back edge of the seat cover.



Step 10. Driver & Passenger Bottoms/DB&PB:
Route the long inside edge hook Velcro™ where shown between the seat and the plastic cowling.



Step 11. Driver & Passenger Bottoms/DB&PB:
View from behind the driver's underside, next to the center console. Route the inside edge hook Velcro™ where shown through the gap, just above the metal frame, mating it to the rear loop Velcro™. Route the long hook Velcro™ under the front of the seat, to the loop Velcro™ in back, being sure to route them avoiding any seat mechanisms under the seat.



Step 12. Driver & Passenger Bottoms/DB&PB:
Clip the short hook Velcro™ with the buckle sewn to it under the back of the seat to the seat support wire shown just in front of the clip, then press it to the rear loop Velcro™. Trim the excess length of all the Velcro™. Some repositioning of the seat cover and Velcro™ may be needed to provide the best fit. Remember the seams of your seat should closely line up with the seams of the seat cover.



Step 13. Driver & Passenger Top/DT&PT:

Slide the seat cover on with the extending hook Velcro™ to the front. Pull the cover down into position as shown, tucking the fabric behind the plastic on the sides. The seams of the seat cover should closely line up with the seams of your seat.



Step 14. Driver Top/DT:

Tuck the fabric of the seat cover under the plastic for the headrests starting with the push button release side first.



Step 15. Driver/DT:

Tuck the Velcro™ into the seat. Pull on the fabric not the Velcro™ from behind the seat while using your other hand in a smoothing action from top to bottom, smoothing and tightening the seat cover.



Step 16. Driver Top/DT:

Route the long hook Velcro™ under the seat to the metal bar supporting the seats foam 7-8" in from the back edge. Route them over the top of the bar, then back to the loop Velcro™ sewn inside the seat cover. You may have to smooth and re-fasten more than once.



Step 17. Driver Top/DT:

Re-connect the elastic straps from the carpeted back panel to the plastic hooks under the seat.



Step 18. Driver Top /DT:

Lastly, connect the hook Velcro™ to the carpeted flap, starting on the inside next to the center console, working your way out.



Step 19. Passenger Top/PT:

Place the cover on with the extending hook Velcro™ to the front, and tuck the fabric under the headrest plastic.



Step 20. Passenger Top/PT:

Tuck in the left and right front sides, fold the seat flat and pull the back edge up. Mate the Velcro™ at the back edge,



Step 21. Passenger Bottom/PB:

Install the passenger seat bottom the same as the driver seat bottom, except mate the side and front Velcro to the carpet on the seat.



Step 22. Passenger Bottom/PB:

Likewise, press the hook Velcro™ onto the carpet on the back edge of the seat.




Step 23. Headrests/H:

Slide the headrest covers on with the extending hook Velcro™ to the front. Mate them to the loop Velcro™ sewn inside the back edge.



Step 24. Lid/L:

Connect the Velcro™ under the lid as shown.

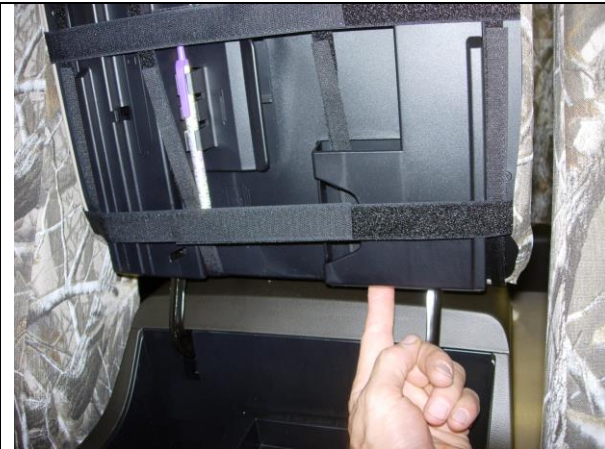

Step 25. Lid/L:
Feed the Velcro™ into the hole in the plastic where shown.



Step 26. Lid/L:
Connect it to the front Velcro™ where shown.



Congratulations, you're done.
It does take a little effort to get them on, but once they're in place they will give you several years of use.



Seat covers that hold a gun, maps, or anything else you want to store, you are all set for the outdoors.