

2007-2014 Chevy/GMC Extended Cab Rear Bench Installation



Step 1. Headrests/H:

All the parts of the seat covers are labeled inside. Use the seat cover piece identification chart as a guide to the abbreviations inside the covers. Slide the headrest covers on with the extending Velcro™ to the front.



Step 2. Headrests/H:

Lift the seat bottom up. Temporarily remove the headrests by gently lifting up and inserting a heavy wire paper clip, or coat hanger into the holes in the left and right sides until it releases. Release one side at a time, holding upward pressure until it comes out.



Step 3. Headrests/H:

Align the seams of the seat cover to the seams of you headrests, they should match closely. Tuck the hook Velcro™ under the back edge and mate it to the loop Velcro™ in back.



Step 4. Top/T:

Tuck the seat cover behind the seat belt and turn the seat cover top inside out so Velcro™ won't stick to the back of the seat carpet yet.



Step 5. Top/T:
Tuck the fabric of the seat cover under the plastic for the headrests.



Step 6. Top/T:
Tilt the seat bottom slightly up and tuck the Velcro™ into the seat.



Step 7. Top/T:
Fold the seat bottom up and feed the hook Velcro's™ through to the bottom.



Step 8. Top/T:
Form the seat cover to the seat around the top and sides, aligning the seams of the seat cover to the seams of your seat. Wrap the far left and right 1" hook Velcro's™ around to the sides and press the side loop Velcro onto it. Do both sides, then re-tighten them a few times if necessary to get the cover tight.



Step 9. Top/T:
Fold the long hook Velcro's in half lengthwise with the sticky part to the inside.



Step 10. Top/T:
With the seat bottom up, lay on the floor of the truck and poke the folded in half Velcro's™ straight up, routing them the top. Mate them to the carpet on the back of the seat top using one hand in a smoothing action from top to bottom while pulling on them from the top. Mate the Velcro at the top to the carpet on the seat.




Step 11. Bottom/B:

With the bottom folded up, slide the seat cover on with the cut-outs for the nylon seat release straps to the bottom and feed the straps through the cover.




Step 12. Bottom/B:

Pull the cover down and form the cover to the seat. Work the fabric inside the seat cover to the middle of the seat, or from thumb and middle finger to pointer finger.

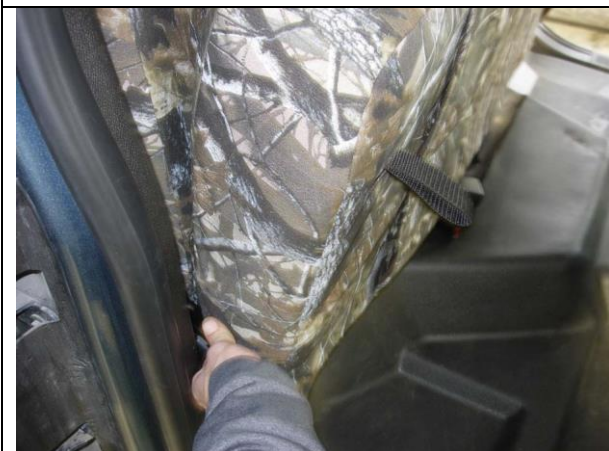

Step 13. Bottom/B:

Pull the left and right side down, again lining up the seams of the seat cover to the seams of the seat. Then, tuck the top of the seat cover into the seat, and mate it to the carpet on the seat as shown on step 14.

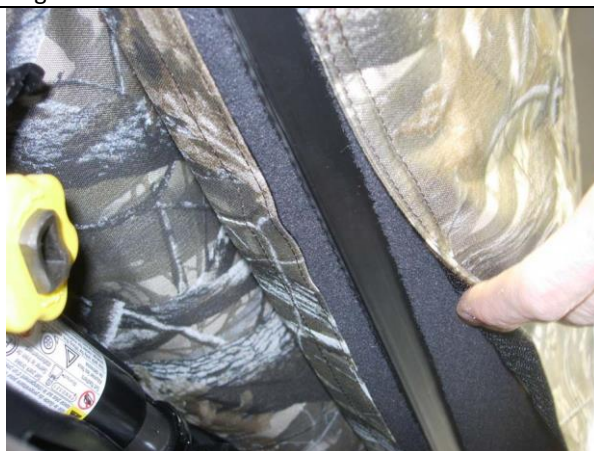

Step 14. Bottom/B:

View from under the seat when folded up. Mate the hook Velcro™ under the seat to the carpet, starting on one side moving to the other. This may take a few tries to get the wrinkles out and line it up properly.