


## 2009-2010 Dodge Rear Bench Installation



**Step 1.**  
Lift the seat bottom up and temporarily remove the headrests by depressing the push button releases while gently lifting up. The middle headrest buttons need to be pushed in before lifting it up to remove.

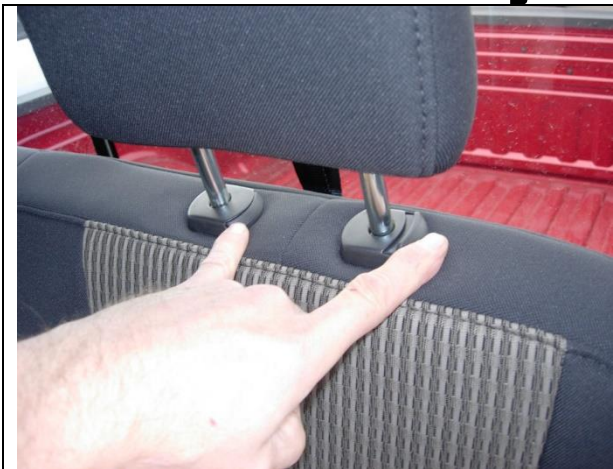

**Step 2. Top/T:**  
All parts of your seat cover are labeled inside. Use the seat cover piece identification chart to ID parts. Tuck the seat cover behind the center seat belt with the long hook (sticky) Velcro™ on top.



**Step 3. Top/T:**  
Tuck the fabric under the plastic for the headrests, starting with the push button side first as shown.



**Step 4. Top/T:**  
Fold all the top Velcro™ in half lengthwise. This will make it stiffer and easier to route behind the seat. Route the long hook Velcro™ down behind the seat by first lifting the bottom of the seat into the backrest, this will pull the backrest away from the back of the cab. Pull the seat bottom down partway and reach up from under the backrest, then feel for them and pull them thru. Don't connect them yet.



**Step 5. Top/T:**

Tuck this long side hook Velcro™ into the seat, and lift the seat up. Look under the seat and carefully pull it tight and form the seat cover around the bottom corner.



**Step 6. Top/T:**

Next, route the side hook Velcro™ straight up the side of the backrest. It's hard to see, but it's under my middle finger. Then, push the loop Velcro™ (under my thumb) down onto the hook Velcro™. Re-connect and tighten the sides if necessary.



**Step 7. Top/T:**

Tuck the seat cover behind the plastic cowling. Line up the seams of the seat cover to the seams of your seat, they should match closely. Make sure the left and right sides done before proceeding to Step 8.



**Step 8. Top/T:**

Lastly, pull the long hook Velcro™ down and connect them to the loop Velcro™ (thumb) sewn inside the front edge. Pull the front edge of the seat cover down and back hard, then connect the Velcro™. Re-connect Velcro™ to tighten slack areas if necessary.



**Step 9. Bottom/B:**

Slide the seat cover bottom with the "B" up, or on the seating area. Work the fabric inside the seat cover to the middle from thumb and middle finger to the pointer finger.



**Step 10. Bottom/B:**

Lift the seat bottom up partway and tuck the seat cover under the seat belts and into the seat with the extending hook Velcro™ on the top.



**Step 11. Bottom/B:**

Tuck the seat cover under the plastic as shown, and along the side of the seat. Line up the seams of the seat cover to the seams of your seat, they should match closely.



**Step 12. Bottom/B:**

Feel for the hook Velcro™ under the seat. Using one hand in a smoothing action from the front to the back on the top to remove slack, then press the Velcro™ to the carpet as shown.



**Step 13. Bottom/B:**

Starting at one side moving to the other, press the hook Velcro™ to the carpet under the seat as shown.



**Step 14. Headrest/H:**

Slide the seat cover on with the extending hook Velcro™ to the front, connecting them as shown.