



2009-2022 Dodge Quad Rear 40-60 Installation

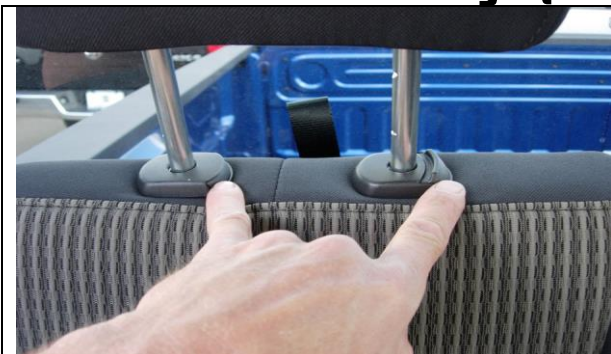

Step 1.

Lift the seat bottoms up and temporarily remove the headrests by depressing the push button releases simultaneously while gently lifting up until the headrest comes out. Make sure to lift the seat bottoms up to reinstall the headrests back into the seat after the installation for the tops is complete.

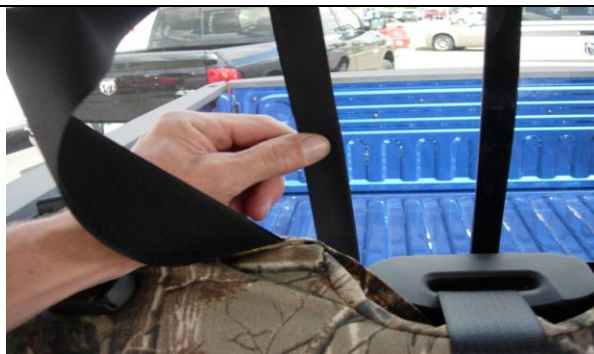

Step 2. Driver & Passenger Top/DT&PT:

All the parts of the seat cover are labeled inside. Use the Seat Cover Piece Identification Chart to ID parts. Tuck the cover behind the seat belt with the long hook Velcro to the top, and tuck the fabric behind the seat and in front of the plastic seat belt box that is fastened to the back of the cab.



Step 3. Driver & Passenger Top/DT&PT:

Tuck the fabric under the plastic for the headrests, starting with the push button side first.



Step 4. Passenger Top/PT:

Lift the seat bottoms up, fold the hook Velcro™ in half, and then slide them down behind the seat. Slide the hook Velcro™ down in front of the seatbelt as shown. Line up the seams of the seat cover to the seams of the seat on the left, right, they should match closely.



Step 5. Driver & Passenger Top/DT&PT:

Reach up behind the seat and pull the long hook Velcro™ down, mating them to the loop (fuzzy) Velcro™ sewn inside the front edge.



Step 6. Passenger Top/PT:

(View from under the passenger side with the seat bottoms up, Passenger outside edge.) Tuck the outside edge hook Velcro™ in, routing them at an angle to the side of the seat and connect it to the Velcro™ sewn on the side. Some re-connecting of the Velcro™ may be necessary to provide the best fit.



Step 7. Passenger Top/PT:
Tuck the fabric behind the plastic, and re-tighten the hook Velcro™ from Step 8.



Step 8. Headrests/H:
Slide the covers on with the extending hook Velcro™ to the front. Line up the seams, and mate the Velcro™ as shown.



Step 9. Driver & Passenger Bottoms/DB&PB:
Tilt the seat up, and slide the seat covers on with the letters "DB" & "PB" up.



Step 10. Driver & Passenger Bottoms/DB&PB:
Work the fabric from the seams inside the cover to the middle (pointer finger), and line up the seams.



Step 11. Driver & Passenger Bottoms/DB&PB:
Tuck the top part of the seat cover in.



Step 12. Driver & Passenger Bottoms/DB&PB:
Mate the hook Velcro™ to the carpet on the seat, starting on one side moving to the other.