

2014-2019 Chevy Double Cab Rear 60-40 Installation



Step 1. Headrests/H:

All the parts of the seat cover are labeled on the inside right front of each part. Use the seat cover PART ID Chart to ID parts. Slide the headrest covers on while the headrest is still on the seat with the extending hook (sticky) Velcro™ to the front.



Step 2. Headrests/H:

Lift the seat bottoms up, and temporarily remove the headrests by gently lifting up and depressing the push button releases on each piece of plastic.

For video installation, follow this link:

<https://youtu.be/BNQzOcvYQuE>



Step 3. Headrests/H:

Line up the seams of the seat cover to the seams on the headrest, they should closely match. Tuck the front Velcro™ behind the back edge and connect it to the loop Velcro™ sewn inside the back edge as shown.



Step 4. Driver & Passenger Top/DT&PT:

The top of the seat covers will have openings for the headrests. Tuck the fabric under the plastic for the headrests, starting with the push button side first. View of the passenger side.



Step 5. Driver & Passenger Top/DT&PT:
Carefully disconnect the Velcro™ on each side. Be careful to NOT keep your hand on the top of the seat while working on the seat cover. The seat bottoms are spring loaded and come down quickly when moved, crushing your fingers into the back of the cab.



Step 6. Driver & Passenger Top/DT&PT:
Lift the seat up, and pull the top of the seat cover down, lining up the seams of the seat cover to the seams of the seat, same as Step 3. Continue to pull the seat cover down, and tuck in the left and right front corners.




Step 7. Driver & Passenger Top/DT&PT:
With the seat bottoms lifted up, press the Velcro™ to the back side of the seat top as shown.



Step 8. Driver & Passenger Top/DT&PT:
Tuck in the front edge of the seat cover.



Step 9. Driver & Passenger Top/DT&PT:
View of passenger side. Lift the seat bottoms up, and pull the left and right Velcro™ thru to the underside as shown.

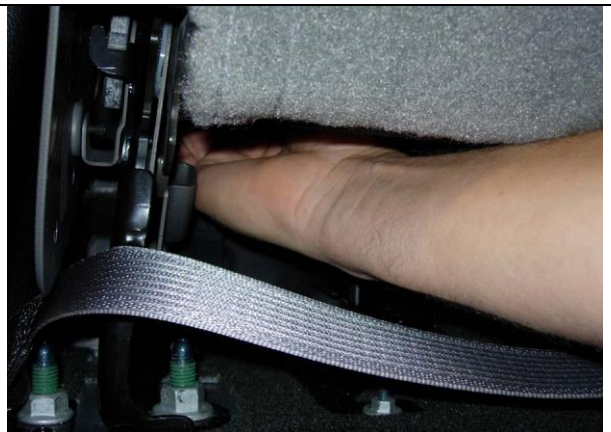

Step 10. Driver & Passenger Top/DT&PT:
While sitting on the floor with your legs out the door, route the Velcro™ up and around to the outside of the seat with your right hand, and catch it on the side of the seat with your left hand.



Step 11. Driver & Passenger Top/DT&PT:

Stand up outside the truck. Use one hand in a smoothing action down the front of the seat cover while pulling up slack on the hook Velcro™ keeping it pressed to the seat. Press the loop Velcro™ onto the hook velcro™.

**The instructions on what to do with the 2"X22" hook Velcro™ sewn on the bottom edge of the Driver Top/DT right in the center will be explained in Step 12.



Step 12. Driver & Passenger Top/DT&PT:

Repeat Steps 10 & 11 for the inside Velcro™ where the seats meet in the center. It's helpful to keep one seat bottom folded up at a time when connecting these Velcro™. **Driver Top/DT:** Lift the seat bottom up. Fold the large hook Velcro™ in half lengthwise with the sticky side in. It's sewn in the middle of the bottom edge. Move the seat bottoms down slightly and slide the Velcro™ upward behind the backrest towards the back window. Feel for it from behind the top of the seat. Peel the seat cover back in that exact spot (Step 7), pull the Velcro™ tight and press it to the fuzzy carpet on the back edge of the top of the seat, then reconnect the top of the set cover to the fuzzy carpet.



Step 13. Driver & Passenger Bottoms/DB&PB:

Slide the seat covers on with these extending hook Velcro™ pointing down.



Step 14. Driver & Passenger Bottoms/DB&PB:

Tuck the seat cover under the plastic cowling on the outside edge, and feed the Velcro™ thru as shown.



Step 15. Driver & Passenger Bottoms/DB&PB:
Fold the seat bottom down, and tuck the seat cover in.



Step 16. Driver & Passenger Bottoms/DB&PB:
Lift the seat bottoms up partway, and pull the seat cover down into position, again lining up the seams of the seat cover to the seams of the seat. Pull it tight and press the inside edge Velcro™ next to the center seatbelts onto the carpet on underside of the seat.



Step 17. Driver & Passenger Bottoms/DB&PB:
Pull the outside edge Velcro™ tight, and press it to the carpet under the seat, same as Step 16.



Step 18. Driver & Passenger Bottoms/DB&PB:
View from under the passenger seat. Pull the back edge of the seat cover tight, and press it to the carpet, right next to the plastic as shown.



Step 19. Driver & Passenger Bottoms/DB&PB:
Pull the bottom side of the seat cover down, and press the Velcro™ to the carpet on the seat.



Step 20. Driver & Passenger Bottoms/DB&PB:
The outside of the seat bottoms should look like this when properly installed.