

## 2014-2019 Chevy/GMC Double Cab Rear Bench Installation




### Step 1. Headrests/H:

All the parts of the seat cover are labeled inside. Use the Seat Cover Part ID chart to ID parts. Slide the headrest cover on while the headrest is still on the seat with the extending hook (sticky) Velcro™ to the front. This rear installation is viewable on YouTube by Headwaters Seat Covers.



### Step 2. Headrests/H:

Lift the seat bottoms up, and depress the push button release while gently lifting up to remove the headrests. Line up the seams of the seat cover to the seams on the headrests, they should match closely. Tuck the hook Velcro™ under the back edge and press it to the loop Velcro™ sewn inside the back edge.

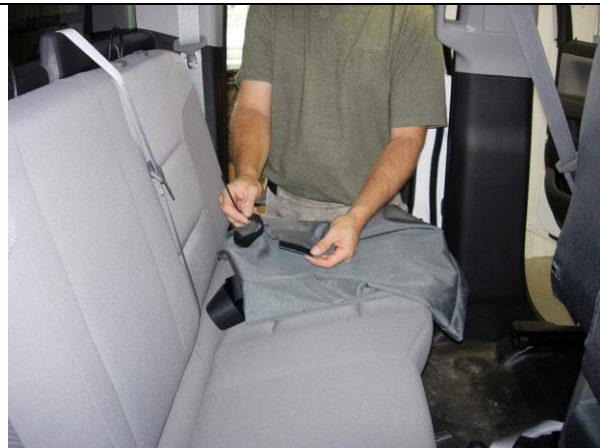

### Step 3. Top/T:

Carefully open the left and right sides of the seat cover.



### Step 4. Top/T:

Place the seat cover on with the holes for the headrests on top, then tuck the seat cover behind the seat belt as shown.



**Step 5. Top/T:**

Flip the seat bottom up and form the top of the seat cover to the top of the seat.  
\*\*\*\* Be careful to **NOT** fold the seat bottom down with your fingers behind the top of the seat, they'll get crushed.



**Step 6. Top/T:**

Carefully tuck the seat cover fabric under the plastic for the headrests starting with the push button side first as shown.




**Step 7. Top/T:**

Tuck the front edge in and poke the two long hook Velcro™ between the seats.



**Step 8. Top/T:**

Tuck the left and right corner Velcro™ between the seats.

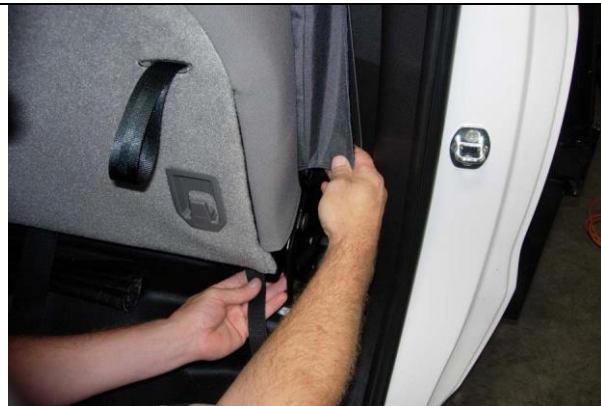

**Step 9. Top/T:**

Lift the seat bottom up. Pull the bottom edge of the set cover around the bottom corner of the seat on each side and find the corner Velcro™ (Left hand).



**Step 10. Top/T:**

View of the driver side. While sitting on the floor, with the side Velcro™ in your left hand, reach under the seat and wrap it around the bottom corner to the side of the backrest.



**Step 11. Top/T:**  
Press and hold the hook Velcro™ to the seat.



**Step 12. Top/T:**  
While pulling the cover tight, connect the side Velcro™.



**Step 13. Top/T:**  
Line up the seams of the seat cover to the seams of the seat on left, right, and top, they should match closely. Fold the two long front hook Velcro™ from Step 7 in half lengthwise as shown to stiffen them up.



**Step 14. Top/T:**  
Slide the Velcro™ up towards the back window. Move the seat bottom down a little bit at first, this will pull the bottom of the backrest away from the back wall and make it easier to slide up.



**Step 15. Top/T:**  
Reach down from the top and feel for the Velcro™. Once located, slide one hand down the front of the seat cover in a smoothing action while pulling the Velcro™ up and tight, then press it to the fuzzy carpet located behind the top of the seat. Lastly, pull the top of the seat cover tight and press it to the fuzzy backside of the top of the seat.



**Step 16. Bottom/B:**  
Slide the seat cover on with the cut-outs for the seat releases to the underside of the seat. Folding the Velcro™ inside out will help you in sliding the seat cover on.



**Step 17. Bottom/B:**

Locate the openings for the seat releases and feed the nylon seat release loops thru them.



**Step 18. Bottom/B:**

Fold the seat down and tuck in the back edge.



**Step 19. Bottom/B:**

Lift the seat bottom up, and again line up the seams as in Steps 2 & 13. Pull the back, or topside of the seat cover tight and press the hook Velcro™ to the fuzz as shown.



**Step 20. Bottom/B:**

Lastly, pull the bottom side of the seat cover tight, and press it to the fuzz under the sea as shown. For video installation, follow this link:  
<https://youtu.be/PIVdcaN2plo>