


2015-2022 Canyon Buckets



Step 1. DB/PB: Driver & Passenger Bottoms
All pieces are marked with a letter on the inside of the cover. There will be a sheet provided that shows what each letter belongs to. Disconnect the Velcro and lay the cover out on the seat. Start to form the cover to the seat. Make sure to match the seams of the cover with the seams of your seat.

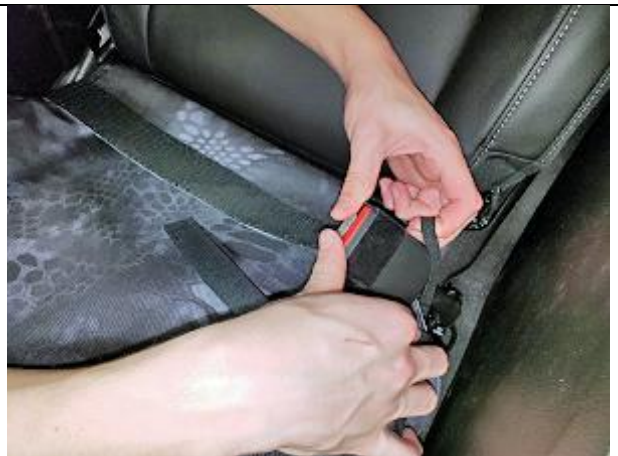

Step 2. DB/PB: Driver & Passenger Bottoms
If your seatbelt buckle has an elastic strap around it, remove the strap.



Step 3. DB/PB: Driver & Passenger Bottoms
Take the Velcro strap that's on the inside of the cover and feed it down and toward the rear of the seat.



Step 4. DB/PB: Driver & Passenger Bottoms
On the outside of the cover, you'll find a rope sewn into the cover. Take this and tuck it behind the plastic on the edge of the seat. Make sure to tuck the front corner behind the plastic as well.



Step 5. DB/PB: Driver & Passenger Bottoms

Take the tail end of the cover and tuck it in-between the seat top and bottom.



Step 6. DB/PB: Driver & Passenger Bottoms

Take the long Velcro straps on the front of the cover and fold them in half long ways. This will stiffen them up and make it easier to feed under your seat. Now, take the straps and feed them under the seat.

IMPORTANT: Make sure you go over any wires or electronics under the seat. If you have electric seats, move the seats up as much as possible.



Step 7. DB/PB: Driver & Passenger Bottoms

On the driver side, for electric seats, there is a silver motor for the seat. Make sure you feed the Velcro over the motor.



Step 8. DB/PB: Driver & Passenger Bottoms

Go behind your seat and grab the tail end that you shoved through in Step# 5.



Step 9. DB/PB: Driver & Passenger Bottoms

Take the Velcro that you fed from the front and side of the cover and pull tight. Now, attach them to the fuzzi on the back of your seat bottom.



Step 10. DB/PB: Driver & Passenger Bottoms

Take the tail end and attach it to the fuzzi. This will cover over the other Velcro.



Step 11. H: Headrests

Take the cover and place it on the headrest with the extending Velcro on the front. If you are having some trouble pulling it down, try using a sawing motion to get it down. As noted before, you are going to be lining up the seams on the cover with the seams of the headrest.



Step 12. H: Headrests

Once the cover is down all the way, we need to remove the headrest. If you lift your headrest up a little, you will notice the 2 plastic rings around the headrest pegs. One has a little hole on the side and one has a push button. Insert an allen wrench or piece of metal into the hole in the plastic and push the button while holding gentle upward pressure until the headrest releases.



Step 13. H: Headrests

Now, take the extending Velcro and attach it to the Velcro on the other side.



Step 14. H: Headrests

Make sure you don't get the cover too tight. It is made to be a little looser so that the cover can fold around the edge and sit in the dip of your backrest.



Step 15. DT/PT: Driver & Passenger Tops

With the headrests removed, you can now take the backrest cover and pull it on with extending Velcro to the front. Similar to the headrest, if you are having a hard time putting these on, try a sawing motion to put them on.



Step 16. DT/PT: Driver & Passenger Tops

Once the cover is pulled down, the plastic headrest slots can be slipped through.

IMPORTANT: On the push button plastic, make sure you start pulling it through on the push button side. If you start on the other side, it will put a bunch of pressure on the button and potentially brake it.



Step 17. DT/PT: Driver & Passenger Tops

Take the front extending Velcro and tuck it in-between the seat top and bottom.



Step 18. DT/PT: Driver & Passenger Tops

Go behind your seat and find the extending Velcro. Grab the material (not the Velcro) and pull down tight. Now, pull it up and against your seat with the Velcro facing out.



Step 19. DT/PT: Driver & Passenger Tops

Take the flap from the back of the cover and pull down on it and attach it to the extending Velcro.



Step 20. L: Lid

Disconnect all the Velcro and place the cover on with the "L" toward the back of the cab.



Step 21. L: Lid

Once situated, open the lid and feed the rear Velcro straps in-between the lid and console.



Step 22. L: Lid

Take the Velcro and connect each of them with their counterparts on the other side.



Step 23. L: Lid

Once it's done it should look something like this.



Congrats!

You have installed your covers!