


2015-2022 Colorado Buckets



Step 1. DB/PB: Driver & Passenger Bottoms
All the parts of your seat cover are labeled inside. Use the "Seat Cover Part ID" chart to identify parts. Call 877-485-3001 with any installation questions. Driver bottom has "DB" printed on the inside back right, PB is for the passenger seat. For electric controlled seats, lift the seat all the way up. Move both seats forward allowing room to work behind the seat. Carefully disconnect the Velcro. Place the cover on with the long hook Velcro to the front as shown.

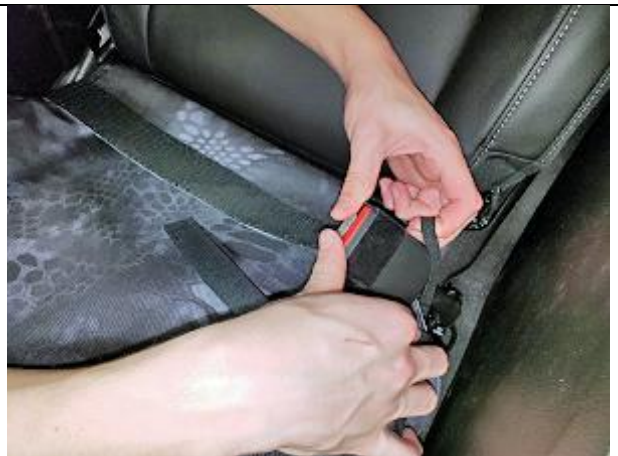

Step 2. DB/PB: Driver & Passenger Bottoms
Push the seatbelt back out of the elastic constraint.



Step 3. DB/PB: Driver & Passenger Bottoms
View of the inside edge of the passenger seat next to the console. Fold the long side hook Velcro in half lengthwise with the sticky facing in. This stiffens it up and makes it easier to route. Poke it between the seat and the



Step 4. DB/PB: Driver & Passenger Bottoms
Tuck the thickened outside edge of the seat cover behind the plastic cowl (indicated by the arrows)



Step 5. DB/PB: Driver & Passenger Bottoms
Fold the backrest forward, then tuck the back in.



Step 6. DB/PB: Driver & Passenger Bottoms
Fold the long hook Velcro in half lengthwise with the sticky facing in. This will stiffen them up and make it easier to route.



Step 7. DB/PB: Driver & Passenger Bottoms
For electric controlled seats, route the Velcro over the top of the motor between the seat and the motor.



Step 8. DB/PB: Driver & Passenger Bottoms
Pull the cover snug from behind the seat. Use one hand in a smoothing action on the seating area, and both sides as you pull, taking up slack and forming the cover to the front and sides of the seat bottom.
Look at the placement of the seat cover. Adjust/line up the seams of the seat cover to the seams of your seat, they should match closely.



Step 9. DB/PB: Driver & Passenger Bottoms

Use one hand to hold the back of the seat cover in place, then pull on the hook Velcro from the front and press it to the fuzzy carpet on the back edge of the seat bottom. Lastly, using the same smoothing action from front to back along the console, take up the slack and connect the inside edge Velcro to the carpet fuzz (shown top left).



Step 10. DB/PB: Driver & Passenger Bottoms

Lastly, pull the cover back and press the hook Velcro to the fuzzy carpet on the back edge of the seat.



Step 11. H: Headrests

Slide the cover on with the extending hook Velcro to the front. Recline the backrest.



Step 12. H: Headrests

Remove the headrests by gently lifting them up, then depress the push button release. Wedge your hand under the headrest to hold it up. Continue gentle upward pressure, then push a small Allen wrench, or similar tool into the small hole in the plastic (shown on the left) until it releases.



Step 13. H: Headrests
Connect the Velcro at the back edge of the headrest.



Step 14. H: Headrests
Leave enough slack in the cover to allow the headrest to sit flush to the seat if needed.



Step 15. DT/PT: Driver & Passenger Tops
Provisions are made for the Side Impact Airbags. It is critical to get the covers on the proper seat to allow the airbag to function.
The Driver Top has "DT" printed on the inside right front corner, PT is for the Passenger Top.
Slide the covers on with the extending hook Velcro to the front. Line up the seams of the seat cover to the seams of your seat on left and right, they should match closely.



Step 16. DT/PT: Driver & Passenger Tops
Tuck the fabric under the plastic for the headrests, starting with the push button side first as shown.



Step 17. DT/PT: Driver & Passenger Tops
Tuck in the front edge.



Step 18. DT/PT: Driver & Passenger Tops
From behind the seat, pull the cover thru. Form the cover to the top of the seat and use the same smoothing action from top to bottom while gently pulling on the Velcro from behind the seat. Connect the left and right side Velcro first, sliding your hand down the front, taking up slack. Connect the center Velcro last, making sure to not over tighten it creating wrinkles on the front left and right.



Step 19. DT/PT: Driver & Passenger Tops
The completed task should look like the picture.



Step 20. L: Lid
Carefully disconnect the Velcro and place the cover on with the "L" printed on the inside to the back.



Step 21. L: Lid

Use one hand to hold the cover in place, and open the console.



Step 22. L: Lid

Connect the top to bottom Velcro first, the sides.



Step 23. L: Lid

The completed task should look like the picture.



Congrats, you're done!

Thanks for the business!