

2019-2020 Ford Ranger Bucket Seat Installation




Step 1. H: Headrests

All our pieces are marked on the inside of the cover to show where they belong. These will be marked with a H. Pull the cover over your headrests with the extending Velcro on the front of the headrest.



Step 2. H: Headrests

Once the cover is positioned correctly, remove the headrest by pushing in the buttons on the headrests plastics.

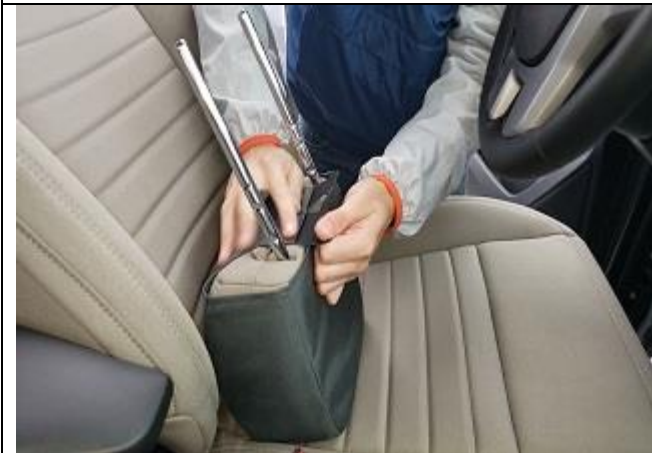

Step 3. H: Headrests

Once you have the cover in place, connect the extended Velcro from the front to the Velcro on the back of the headrests.



Step 4. DB/PB: Driver and Passenger Bottoms

Undo the Velcro and lay the cover onto the seat. Take the 2 Velcro with buckles and lay them in the back for now. Make sure the Velcro is out from under the cover.



Step 5. DB/PB: Driver and Passenger Bottoms

Take the flap and tuck it in-between the backrest and seat bottom. Make sure to tuck it in so that the flap is flat against the seat.



Step 6. DB/PB: Driver and Passenger Bottoms

Take the long Velcro near the seat buckle and tuck it toward the rear of the seat. Make sure you don't get it wrapped around the seat buckle.



Step 7. DB/PB: Driver and Passenger Bottoms

Take the Velcro on the outside side of the cover and fold it in half long ways to stiffen it up. Now push your seat away from the plastic and you will see a small space to feed the Velcro through.



Step 8. DB/PB: Driver and Passenger Bottoms

Once you stick it through it will end up popping out at the bottom of your seat.



Step 9. DB/PB: Driver and Passenger Bottoms

Take the front 2 Velcro, fold them in half long ways and feed under your seat toward the rear. Make sure you go above any wires. You don't want to pin down any of the wires and accidentally pull one loose.



Step 10. DB/PB: Driver and Passenger Bottoms

Unfortunately, with this model, the flap on the rear of the seat is non-removable. We will show some pictures of how the pieces connect separately so that you can have an idea of how they hook up. Lean your seat all the way back. Take your hand and reach into the open space between the flap and seat. Pull the cover flap the you fed through in step #5 tight.



Step 11. DB/PB: Driver and Passenger Bottoms

Now, reach out from under the flap and grab the 2 long Velcro. Pull them into the space between the flap and seat.



Step 12. DB/PB: Driver and Passenger Bottoms

Pull the Velcro tight and connect it to the loop on the back of the cover. The will be connected in the space between flap and seat. This will be a little difficult to do.



Step 13. DB/PB: Driver and Passenger Bottoms
Take the side Velcro and pull both of these tight. This will pull the sides of your cover down.



Step 14. DB/PB: Driver and Passenger Bottoms
Once again, you will need to pull them into the space between flap and seat. Connect them to the outside edge of the loop Velcro as shown.



Step 15. DB/PB: Driver and Passenger Bottoms
Find your buckle Velcro.



Step 16. DB/PB: Driver and Passenger Bottoms
Under your seat there are several little bars that you can hook the buckles to. Focus toward the center of the seat and clip them on.



Step 17. DB/PB: Driver and Passenger Bottoms

Take the other end and connect them to the cover as shown.



Step 18. DT/PT: Driver and Passenger Tops

Pull the cover over, making sure to match the seams of your seat to the seams of our cover.



Step 19. DT/PT: Driver and Passenger Tops

When the cover is pulled down, feed the headrest plastics through the holes at the top.

***Important!** Make sure that when you are shoving the plastic through, you start on the button side. If you start on the other side, you have a possibility of breaking the buttons.



Step 20. DT/PT: Driver and Passenger Tops

Feed the long straps in-between the backrest and seat bottom.



Step 21. DT/PT: Driver and Passenger Tops

Once again you'll want to lay the seat back and reach into the open space. Continue to feed the long straps into the space and then feed them out of the flap space and unto the open area under the seat.



Step 22. DT/PT: Driver and Passenger Tops

Take each Velcro and wrap them around one of the metal bars under the seat. Then pull them back into the flap space and connect them back to the cover itself. Make sure that you pull the cover down as tight as you possibly can before you wrap them around the metal. If you need to tighten the cover more after you wrap around, make sure you pull on the material itself and not the Velcro.



Step 23. DT/PT: Driver and Passenger Tops

Lastly, take the back flap of the backrest cover, pull tight and connect it to the fuzzy material on the backside of the flap.

Now you have completed your install. The driver and passenger sides install the exact same way.