

# 2019-2024 Chevy/GMC 40/20/40 with Non-Opening Console and Non-Opening Middle Bottom



## Step 1. H:

Easily the most difficult headrest to remove. You may want an extra hand for this one. You will need an Allen wrench or similar. Push down and pull away the fabric near the plastic that the headrest pegs are in. You'll find a little ring that needs to be pushed toward the rear of the seat. Hook your Allen wrench into the ring and push. When it releases hold the headrest peg up while you release the second peg.



## Step 2. H:

**All pieces are marked with a letter on the inside of the cover. There will be a sheet provided that shows what each letter belongs to.** Take the headrest cover marked with H, and slip it over the headrest with the extending Velcro on the front of the headrest. We have provided an opening on the side of the cover for the push button. The cover is tucked under the button plastic. Once the cover is on the headrest nice and tight, fold the extended Velcro around the bottom of the headrest and connect it to the Velcro on the other side of the cover.



## Step 3. DB/PB: Prep

Before we can install the bottom, we have to disconnect the rear flap from the seat. Reach under your seat from the rear and you'll notice 2 elastic strips. At the end of these strips are little plastic hooks. Carefully, remove the hooks by pushing forward toward the front of the seat. Once both are disconnected you'll be ready to install your bottoms.  
**\*Make sure you remember where there were located. You don't want to install anything over these spots.**



## Step 4. DB/PB:

Place the cover onto your bottom with all the Velcro detached and extending away from the cover. The Velcro with clips on them can be set to the side. Start forming the cover onto the seat, matching the seams on the sides of the seat to the seams on the cover. Once you get it situated, tuck the tail end of the cover in-between the bottom and backrest.



**Step 5. DB/PB:**

Go to the back of the seat and finish pulling the tail end toward you. Pull in tight, this will help form it to the front.



**Step 6. DB/PB:**

Now, on the front of the cover you'll notice some long hook Velcro. You need to send these under your seat toward the back. It will help to fold these in half long ways. **IMPORTANT:** Make sure you go over any wires or electronics under the seat. If you have electric seats, move the seats up as much as possible and go over the motor as shown.



**Step 7. DB/PB:**

On the side toward the door you'll see another long hook Velcro. Push your seat cushion in; you'll see a space to send the Velcro through.



**Step 8. DB/PB:**

The Velcro on the inside of your cover is sent under your seat in-between your bottom rail and seat as seen here and in step 10.



**Step 9. DB/PB:**

Go to the back of your seat and pull down on the tail end that we sent through before. While holding it tight grab the long hook Velcro from the front and attach them to the fuzzy loop on the tail.



**Step 10. DB/PB:**

Take the hook Velcro from the sides and attach them to the loop on the tail as well.



**Step 11. DB/PB:**

Now it's time to hook up the Velcro with clips on them. The inside hook, gets connected to the same bar the flap hook was hooked to, but toward the outside; as seen in the left picture. The outside hook gets hooked toward the middle of the seat on a little metal bar, as seen in the right picture.



**Step 12. DT/PT:**

Before we put the cover on, make sure you are putting the correct cover on the correct seat. **Important: Because the covers are made to accommodate your airbags and mixing the covers up could cause you airbags to not deploy correctly.** The driver side cover has a DT on the inside and our Headwaters Seat Covers label on the outside. Detach the hooked Velcro and set them aside. Now, pull the cover over the backrest.





**Step 13. DT/PT:**

Once you get it all pulled down and situated, you'll want to push the headrest plastics through the provided openings. Now, take the bottom of the front, and tuck it in-between the backrest and seat bottom.



**Step 14. DT/PT:**

Go to the back and finish pulling the cover through the space.



**Step 15. DT/PT:**

Now, take the hooked Velcro and place one on the inside next to the hook from step 11. Place the other one on that same bar but on the far outside toward the door.



**Step 16. DT/PT:**


Pull down tight on the cover that we shoved through and attach the hooked Velcro to the cover on each side.



**Step 17. DT/PT:**  
Take the flap that we disconnected in step 3, and re-connect it to the bar that it was disconnected from.



**Step 18. DT/PT:**  
Now, pull down tight on the back of your backrest cover and attach the Velcro to the fuzzy carpeting on your recently reattached flap.

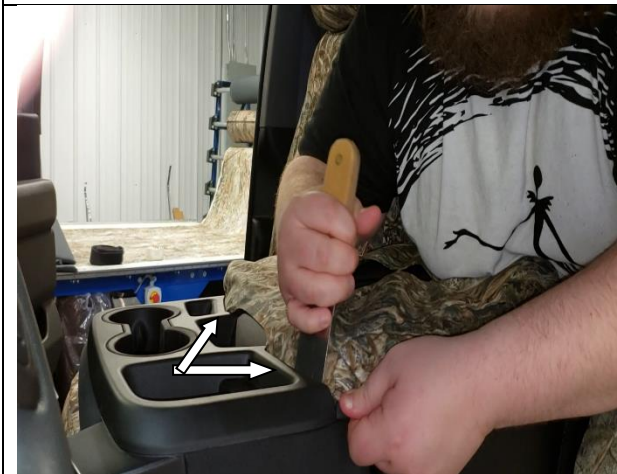

**Step 19. L:**  
Place the lid onto the top of the console. At the front of the lid cover, you'll notice a cut out for the space in the tray and rope inside the material on each side of the opening. Take a butter knife or dull rounded object and tuck the front sections of the cover in. See picture.



**Step 20. L:**  
Move to the back of the cover. You'll notice that the back of the lid also has rope in it. Tuck the cover under the lid, in-between it and the console.



**Step 21. L:**  
Take the thick rope on the left and right side of the lid and tuck them under the lid as well. Just smooth out any wrinkles and you will be good to go.




**Step 22. C:**  
Take the console piece and lay it out. Make sure you pull the seat belt away from the seat and pull the cover under it. Take the part of the cover with the big hole and place it on around the tray on the top of the console.





**Step 23. C:**

Put the cover onto the console, matching the seams of the cover and console. When you get it adjusted correctly, you'll find some hook and loop Velcro on the left side of the tray. Take the 2 Velcro and stick them together. Make sure to line them up. There should be little to no Velcro showing.

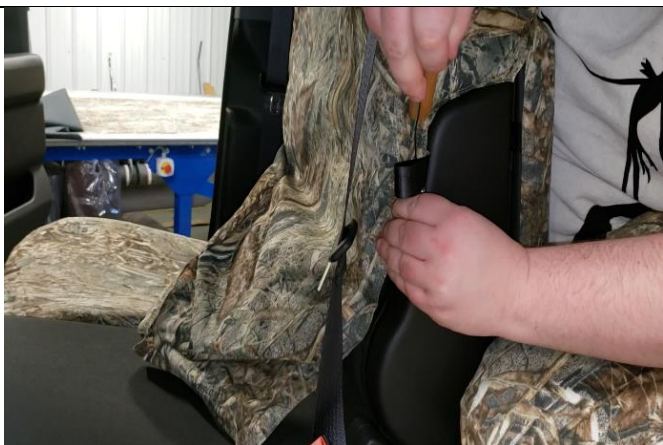

**Step 24. C:**

Go around the edges of the plastic on the sides and tuck in the edges on both the driver and passenger sides. The butter knife or dull rounded object will help here.



**Step 25. C:**

Take the tail end of the cover and shove it in-between the console and middle seat, moving it toward the back of the cab.



**Step 26. C:**

Lay the console down and grab the tail that is now sticking out the back. Give it a good pull and tuck it in-between the lid and console just as we did with the lid in step #20. The key to doing this right is starting in the middle and working your way to the sides while tucking. This will prevent it from bunching up on one side.



**Step 27. MB:**  
Spread the cover out. Notice a thick piece of rope in the front of the cover. Take that end and tuck it under the front of the middle seat until it goes around a lip under the seat.



**Step 28. MB:**  
Take the tail end and tuck it between the console and middle seat. Tuck the sides of the cover down as well. Send the Velcro on the sides to the back as well.



**Step 29. MB:**  
Take the Velcro and wrap it around the back corners and back up to the top flap. Pull the top flap tight but not too tight. You don't want to pull the front of your cover out. Connect the flap and the 2 side Velcro.