

# 2019-2024 Chevy/GMC 40/20/40 with Opening Console and Non-Opening Middle Bottom



## Step 1. H:

Easily the most difficult headrest to remove. You may want an extra hand for this one. You will need an allen wrench or similar. Push down and pull away the fabric near the plastic that the headrest pegs are in. You'll find a little ring that needs to be pushed toward the rear of the seat. Hook your allen wrench into the ring and push. When it releases hold the headrest peg up while you release the second peg.



## Step 2. H:

**All pieces are marked with a letter on the inside of the cover. There will be a sheet provided that shows what each letter belongs to.** Take the headrest cover marked with H, and slip it over the headrest with the extending Velcro on the front of the headrest. We have provided an opening on the side of the cover for the push button. The cover is tucked under the button plastic. Once the cover is on the headrest nice and tight, fold the extended Velcro around the bottom of the headrest and connect it to the Velcro on the other side of the cover.



## Step 3. MB:

Spread the cover out. Notice a thick piece of rope in the front of the cover. Take that end and tuck it under the front of the middle seat until it goes around a lip under the seat.



## Step 4. MB:

Take the tail end and tuck it between the console and middle seat. Tuck the sides of the cover down as well.



**Step 5. MB:**  
Take some rubbing alcohol and scrub down the area shown above. Then before it dries, take a dry towel and scrub it dry.




**Step 6. MB:**  
Take the extra strip of Velcro off of the cover. Take the backing off of it and stick it to the surface. After you place it, make sure to press the entire Velcro against the surface to make sure it has a good stick.



**Step 7. MB:**  
Take the tail end of the cover and fold it over the edge and onto the Velcro we just attached to the surface in Step# 6.



**Step 8. C:**  
Open all the Velcro. Place the cover around the console between the console and seatbelt.

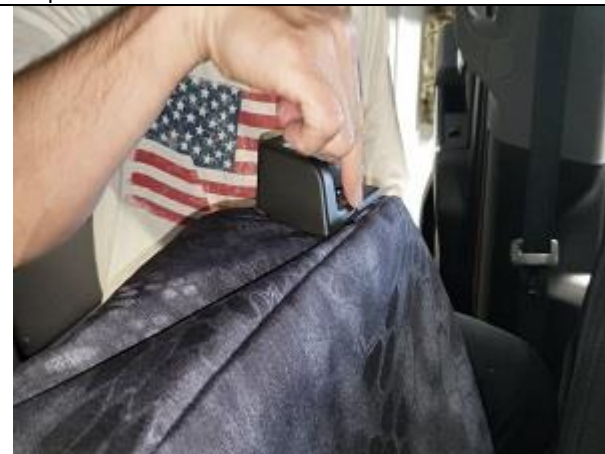

**Step 9. C:**  
Take the top portion of the cover and wrap it around the seatbelt plastic and tuck it underneath.



**Step 10. C:**  
Now, form the cover onto the console, tucking it behind any plastic. Take the tail end of the cover and push it between the console and middle bottom.



**Step 11. C:**

Fold your console down. Position the opening in the cover so that all your console openings are exposed. Then take the edge near the driver seat and connect the edge Velcro together. Make sure the top is even on both side and not crooked.




**Step 12. C:**

If you look at your other Velcro around the edges, you'll notice small adhesive Velcro attached to them. You'll need to fold them over before peeling off the backing and see where they are going to lay on the inside of the console. Once you see where they are going to be, take a rag or towel, wet it with rubbing alcohol, and scrub hard on the areas that you'll need to adhere to. Then dry those spots quickly before the alcohol dries. Now, take the adhesive Velcro and stick them to the cleaned surfaces. The Velcro on the tail end of the cover are fed through the little space between the lid and console and are also attached to the inside of the console.



**Step 13. L:**

Release all the Velcro and lay the lid cover onto the lid with the "L" toward the rear and all the Velcro's extended out. Easiest way to put this on is to sit in the back and pull your back edges on. Then use your knees to hold the cover in place while you pull the front of the cover over.

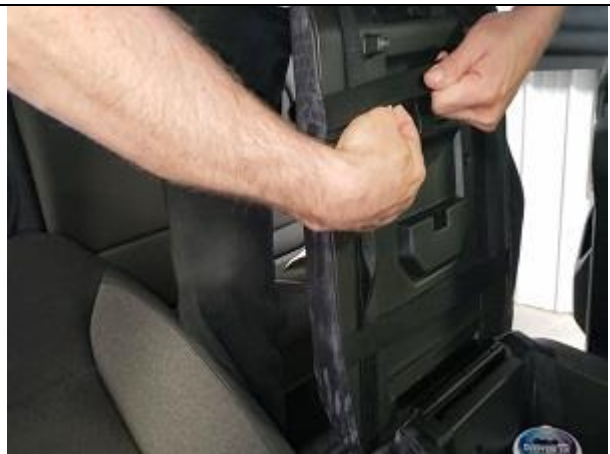

**Step 14. L:**

Once the lid is in place, flip the lid up and connect the vertical Velcro first, then the horizontal ones. Make sure to pull nice and tight while connecting them. Once they are all connected, you can lay the lid down and adjust it as needed.



**Step 15. DB/PB: Prep**

Before we can install the bottom, we have to disconnect the rear flap from the seat. Reach under your seat from the rear and you'll notice 2 elastic strips. At the end of these strips are little plastic hooks. Carefully, remove the hooks by pushing forward toward the front of the seat. Once both are disconnected you'll be ready to install your bottoms.  
*\*Make sure you remember where there were located. You don't want to install anything over these spots.*



**Step 16. DB/PB:**

Place the cover onto your bottom with all the Velcro detached and extending away from the cover. The Velcro with clips on them can be set to the side. Start forming the cover onto the seat, matching the seams on the sides of the seat to the seams on the cover. Once you get it situated, tuck the tail end of the cover in-between the bottom and backrest.



**Step 17. DB/PB:**

Go to the back of the seat and finish pulling the tail end toward you. Pull in tight, this will help form it to the front.



**Step 18. DB/PB:**

Now, on the front of the cover you'll notice some long hook Velcro. You need to send these under your seat toward the back. It will help to fold these in half long ways. **IMPORTANT:** *Make sure you go over any wires or electronics under the seat. If you have electric seats, move the seats up as much as possible and go over the motor as shown.*



**Step 19. DB/PB:**

On the side toward the door you'll see another long hook Velcro. Push your seat cushion in; you'll see a space to send the Velcro through.



**Step 20. DB/PB:**

The Velcro on the inside of your cover is sent under your seat in-between your bottom rail and seat as seen here and in step 22.



**Step 21. DB/PB:**

Go to the back of your seat and pull down on the tail end that we sent through before. While holding it tight grab the long hook Velcro from the front and attach them to the fuzzy loop on the tail.



**Step 22. DB/PB:**

Take the hook Velcro from the sides and attach them to the loop on the tail as well.



**Step 23. DB/PB:**

Now it's time to hook up the Velcro with clips on them. The inside hook, gets connected to the same bar the flap hook was hooked to, but toward the outside; as seen in the left picture. The outside hook gets hooked toward the middle of the seat on a little metal bar, as seen in the right picture.



**Step 24. DT/PT:**

Before we put the cover on, make sure you are putting the correct cover on the correct seat. **Important: Because the covers are made to accommodate your airbags and mixing the covers up could cause you airbags to not deploy correctly.** The driver side cover has a DT on the inside and our Headwaters Seat Covers label on the outside. Detach the hooked Velcro and set them aside. Now, pull the cover over the backrest.



**Step 25. DT/PT:**

Once you get it all pulled down and situated, you'll want to push the headrest plastics through the provided openings. Now, take the bottom of the front, and tuck it in-between the backrest and seat bottom.



**Step 26. DT/PT:**

Go to the back and finish pulling the cover through the space.



**Step 27. DT/PT:**

Now, take the hooked Velcro and place one on the inside next to the hook from step 23. Place the other one on that same bar but on the far outside toward the door.



**Step 28. DT/PT:**

Pull down tight on the cover that we shoved through and attach the hooked Velcro to the cover on each side.



**Step 29. DT/PT:**

Take the flap that we disconnected in step 15, and re-connect it to the bar that it was disconnected from.



**Step 30. DT/PT:**

Now, pull down tight on the back of your backrest cover and attach the Velcro to the fuzzy carpeting on your recently reattached flap.