

2019-2024 Chevy/GMC 60/40 with Arm and Storage



Step 1. DB&PB/Driver & Passenger Bottom:

The installation is available on our YouTube channel, follow this link: <https://youtu.be/8ZNV-43NNYA>
All the parts of your seat cover are labeled on the inside front right of each part. Use our "Seat Cover Part ID" chart to ID parts. Lift the seat bottoms up part way, and slide the cover on with the lettering "DT & PT" on the top side of the seat. Line up the seams of your seat cover to the seams on your seat, they should match closely.



Step 2. DB&PB/Driver & Passenger Bottom:

Form the seat cover tightly to the front of the seat with your hands in a smoothing action from front to back. Fold the seat down and tuck the back edge into the seat, keeping the seatbelt on top.



Step 3. DB&PB/Driver & Passenger Bottom:

Next, pull the extending hook Velcro™ thru from the top side and pressing them to the fuzzy carpet under the seat, working from one side to the other. Lastly, pull down on the underside of the cover and press the hook Velcro™ sewn inside to the fuzzy carpet under the seat bottom as shown.



Step 4. MH/Middle Headrest:

Slide the cover on with the extending hook Velcro™ to the front while the headrest is still on the seat.



Step 5. MH/Middle Headrest:
Release the middle headrest by gently lifting up and depressing the push button release as shown, lifting it up evenly.



Step 6. MH/Middle Headrest:
Lastly, connect the Velcro™.



Step 7. H/Headrest:
Same as Step 4, slide the cover on with the headrest still attached to the seat. Fold the headrest forward by depressing the side button, and remove it same as Step 5 using the two release buttons.



Step 8. H/Headrest:
Tuck the fabric behind the plastic for the push button. Lastly, connect the Velcro™.



Step 9. T/Top:

Carefully disconnect the Velcro™ on the sides of the cover, pull the seat belt away from the seat as shown, and tuck the cover behind it.



Step 10. T/Top:

Tuck the fabric under the plastic for the headrests, starting with the push button side first.



Step 11. T/Top:

Form the seat cover to the top of the seat, again lining up the seams of the seat cover to the seams of the seat, they should match closely.




Step 12. T/Top:

Next, tuck in the left and right sides of the cover as shown.



Step 13. T/Top:

Tuck in the bottom edge of the cover.

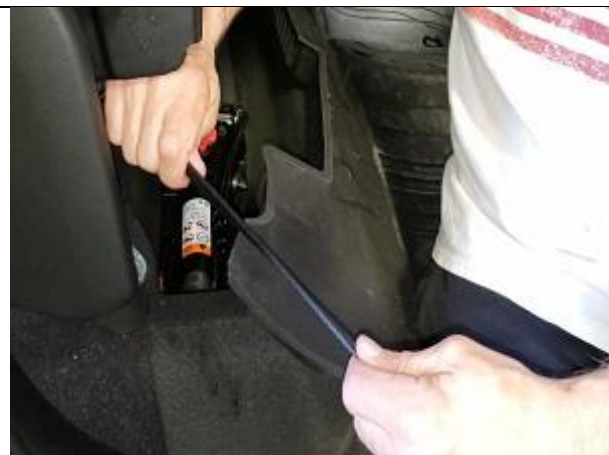

Step 14. T/Top:

Lift the seat bottoms up. Fold the Velcro™ in half lengthwise with the sticky facing in, this stiffens it up making it easier to route.



Step 15. T/Top:

Route the side Velcro under the seat top around to the side of the seat where shown in the left picture. Cradle the Velcro™ in your hand with your palm up and use it to guide the Velcro™ around to the side of the seat.



Step 16. T/Top:

The arrow indicates the location to route the Velcro™. Pull the Velcro™ up while forming the bottom corner of the seat cover to the seat.



Step 17. T/Top:
Pull the cover tight on the side, then press the Velcro™ together.



Step 18. T/Top:
View of under the seat, center seatbelt bracket. Connect the Velcro™ buckle where shown. There is a buckle for each side of the seatbelt opening.



Step 19. T/Top:
Pull the cover down and connect the Velcro™.



Step 20. T/Top:
Fold the armrest down slightly and tuck the fabric under the bottom



Step 21. T/Top:

Next, tuck the thickened seat cover material behind the plastic on the sides. Use caution, the plastic can be sharp on the backside so don't slide your hand along it.



Step 22. T/Top:

Using a tool such as a dull butter knife, tuck the material carefully behind the plastic on top. Some repositioning may be needed to align the opening.



Step 23. T/Top: Driver & Passenger backrest Storage

Align the opening for the storage on the top, sides and bottom.



Step 24. T/Top:

Similar to Steps 20-22, tuck the fabric under the plastic on the top, outside edge, and bottom. **Use caution tucking in the top. There is a piece of sharp metal behind the plastic.**



Step 25. T/Top:
Tuck the fabric behind the hinge area.



Step 26. DTS&PTS/Driver & Passenger Top Storage:
Covers for the Driver Top Storage & Passenger Top Storage are labeled inside the bottom right of each part. "DTS & PTS". Feed the storage compartment release strap thru the provided opening.



Step 27. DTS/PTS:
Center the cover, forming it to the corners, then connect the Velcro™ on the backside as shown.



Step 28. A:
Slide the armrest cover on with the drink holder on top.



Step 29. A:
Feed the pull strap for the armrest thru the provided opening.



Step 30. A:
Align the cover same as previous steps. Tuck the front edge in and fold the armrest down.



Step 31. A:
Pull the hook Velcro™ thru and press it to the armrest as shown.



Step 32. A:
Lastly, connect the Velcro™.