

2019-2024 Chevy/GMC Crew Cab 60/40



Step 1. DB & PB/Driver & Passenger Bottom:
All the parts of your seat cover are marked on the inside right of each part. Use the seat cover Part ID chart for identification.

The installation can be viewed on our YouTube channel: <https://youtu.be/8ZNv-43NNYA>
The Video shows a different seat style with an armrest and storage compartments, but it installs the same. Lift the seat up and slide the cover on with the extending hook Velcro™ on top seen in Step 2.



Step 2. DB & PB/Driver & Passenger Bottom:
Fold the seat down and tuck the cover in. Next, line up the seams of the seat cover to the seams of your seat, they should match closely.



Step 3. DB & PB/Driver & Passenger Bottom:
Use one hand in a smoothing action from front to back on the seating area while pulling on the fabric that was tucked into the seat. Next, press the Velcro™ to the carpet fuzz under the seat as shown. Lastly, pull down on the bottom of the cover and press the Velcro™ to the carpet fuzz under the seat.



Step 4. MH/Middle Headrest:
Slide the cover on with the extending hook Velcro™ to the front and headrest still attached to the seat.



Step 5. MH/Middle Headrest:
Release the middle headrest by depressing the push button release while gently lifting up.



Step 6. MH/Middle Headrest:
Same as Step 2, line up the seams on top, left, and right, then connect the Velcro™.



Step 7. H/Headrest:
Slide the headrest covers on same as Step 4.



Step 8. H/Headrest:
Tuck the fabric under the plastic for the button as shown.



Step 9. T/Top:

Carefully disconnect the Velcro™. Pull the center seatbelt away from the seat, then tuck the cover over the seat aligning the headrest holes in the cover.



Step 10. T/Top:

Tuck the fabric under the plastic for the headrests, starting on the push button side first.



Step 11. T/Top:

Form the seat cover to the top of the seat, again lining up the seams of the seat cover to the seams of your seat.




Step 12. T/Top:

Tuck the cover in on left and right as shown.



Step 13. T/Top:

Tuck the cover into the seat, and lift the seat bottoms up.

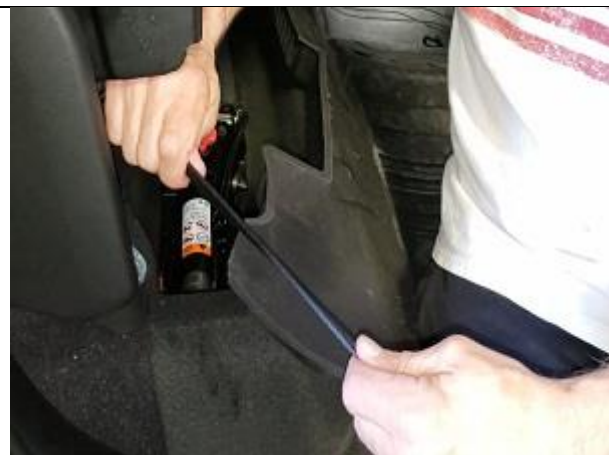

Step 14. T/Top:

Fold the long side hook Velcro™ in half lengthwise with the sticky facing in. This stiffens it, making routing easier.



Step 15. T/Top:

Route the side Velcro under the seat top around to the side of the seat where shown in the left picture. Cradle the Velcro™ in your hand with your palm up and use it to guide the Velcro™ around to the side of the seat.



Step 16. T/Top:

The arrow indicates the location to route the Velcro™. Pull the Velcro™ up while forming the bottom corner of the seat cover to the seat.



Step 17. T/Top:
Pull the cover tight on the side, then press the Velcro™ together.



Step 18. T/Top:
View of under the seat, center seatbelt bracket. Connect the Velcro™ buckle where shown. There is a buckle for each side of the seatbelt opening.



Step 19. T/Top:
Pull the cover down and connect the Velcro™.



Congratulations, and thanks for your business!