

## 2019-2024 RAM 40/20/40 Opening Consoles (Rounded Top)



**Step 1.** First, you'll need to prepare the seats. Make sure the seats are clean and clear of any debris or hair. Next, pull the seat belt buckles through the elastic on the driver, passenger, and middle seats.



**Step 2.** The middle seat has a seat belt attached to it. On the right side, facing the passenger there is a small buckle that you will need to release. Use a screwdriver or something flat to push the red button in and release the seatbelt. Then remove the elastic around it.



**Step 3.** Behind your passenger and drivers seats, near the bottom, are flaps that need to be released. To do so, reach underneath the seat for 2 elastic straps. Feel for the plastic clips at the end and carefully unclip them from the bar they are on.



**Step 4.** Now, to identify your pieces you'll need to look in the bottom right inside corner of the piece. You'll see something similar to the picture. We need the MB first. (You'll have a sheet that will be included in this packet to help identify pieces)



**Step 5. Middle Bottom/MB:**

Fit the cover over your middle seat bottom. It's very important to line up the seams of the seat cover and the seams of the seat. The covers won't fit right if you don't line them up correctly. This goes for all the covers.



**Step 6. Middle Bottom/MB:**

Once you have everything line up good, connect the Velcro to the carpet on the bottom of the seat and then the middle Velcro to each other.



**Step 7. Console/C:**

Stand the console up straight and pull this onto it. Notice the opening for the drink holders should be up. Now position it on there with the seams lining up.  
\*Important note: When lining this up, make sure the space you have behind the drink holders is even. If you have it pulled too much on side the lid may not close.



**Step 8. Console/C:**

Take the sides of the C and attach them the fuzz on the sides of the Console as shown. Don't forget to also tuck them behind the plastic.



**Step 9. Console/C:**

Take the rear strips of Velcro™ and pull them in-between your lid and console as shown.



**Step 10. Console/C:**

Fold the Velcro™ into the cavity and look where they will lay inside. Clean the areas with rubbing alcohol by scrubbing hard and wiping it dry while it's still wet. Pull the Velcro™ tight, peel off the backing and press the adhesive Velcro™ onto the plastic.



**Step 11. Lid/L:**

Undo all the Velcro™ and place the cover on the lid with the L toward the rear. Pull the back edges around the lid and pull tight. Use your arm or knee to hold it while you fit the rest on.



**Step 12. Lid/L:**

Once you have it all situated, connect the vertical Velcro™ and then the horizontal ones as shown in the picture above.



**Step 13. Driver & Passenger Bottoms/DB&PB:**  
Position the cover on the seat with the long strips of Velcro™ hanging off the front. Line up the seams. Tuck the cover behind the plastic cowling on the outside edge.



**Step 14. Driver & Passenger Bottoms/DB&PB:**  
Take the long Velcro™ on the outside edge and fold it in half long ways. Now slip it in-between your seat and the plastic right about where it's sewn on.



**Step 15. Driver & Passenger Bottoms/DB&PB:**  
Once you've fed it through, grab it from underneath your seat and give it a good tug. \*Important: be careful when pulling. Make sure you get it around this little metal piece before pulling too hard.



**Step 16. Driver & Passenger Bottoms/DB&PB:**  
The inside edge just has some hook Velcro™ that attaches to the fuzz on the side of your seat. Position it and press it around the edge of your seat and against the fuzz.



**Step 17. Driver & Passenger Bottoms/DB&PB:**  
If you have electric seats be sure to lift the seat up as high as it will go. This will pull everything away from your seat and free up some space. Take the long hook Velcro™ on the front of the cover, fold it in half long ways, and feed it under the seat above any bars or wires you see.




**Step 18. Driver & Passenger Bottoms/DB&PB:**  
Connect the long front edge hook Velcro™ to the loop Velcro™ sewn on the back edge. Route the outside edge hook Velcro™ (left) at an angle and connect it to the loop Velcro™ sewn on the back edge. Use one hand in a smoothing action from front to back along the outside edge and top of the seat cover while pulling on the back of the seat cover, then tightening the Velcro™.



**Step 19. Driver & Passenger Bottoms/DB&PB:**  
Connect the plastic hooks under the back edge of the seat to the metal bar, and then press the hook Velcro™ to the loop Velcro™ sewn on the back edge. This will keep the seat cover from shifting around.



**Step 20. Headrests/H:**  
Slide the cover on with the headrest still on the seat with the extending Velcro™ to the front.

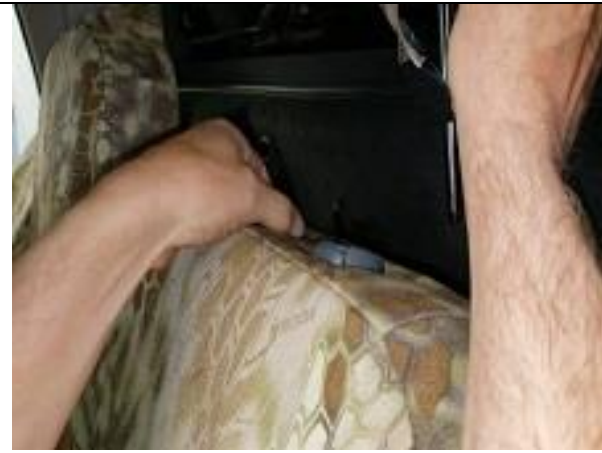

**Step 21. Headrests/H:**  
Recline the backrests and depress the two push button releases shown while holding gentle upward pressure.



**Step 22. Headrests/H:** *(Steps 22 & 23 Only Apply to the large variant of the "Thick Headrest")*  
Once the cover is pulled over, take the Velcro on each of the front corners and connect them.



**Step 23. Headrests/H:**  
Make sure to pull them tight enough that the Velcro is not showing.



**Step 24. Headrests/H:**  
Tuck the front Velcro™ under the back edge and connect it to the loop Velcro™ sewn inside the back edge.



**Step 25. Driver & Passenger Top/DT&PT:**

It's important to make sure you put the driver and passenger covers on the correct side. Each one has been made to accommodate for the airbag and if you put it on the wrong side it will block your airbag. Aside from looking for the DT or PT markings inside the cover. You'll be able to recognize the driver side with ease. The driver's side has our label on the back of it.



**Step 26. Driver & Passenger Top/DT&PT:**

Take the hook clips off the cover and go to the back of the seat. Lift your flap that you detached earlier. You'll notice 2 holes underneath the flap. Take one of the hooks and push it through the hole, clip facing the seat. Push on the hook while moving it up until it clicks in. Do this with the other hole and clip as well.



**Step 27. Driver & Passenger Top/DT&PT:**

Slide the seat covers on with the extending hook Velcro™ to the front. Tuck the fabric under the plastic on the outside edge of the seat.



**Step 28. Driver & Passenger Top/DT&PT:**

Tuck the fabric under the plastic of the headrests starting with the push button side as shown.



**Step 29. Driver & Passenger Top/DT&PT:**

Tuck the hook Velcro™ into the seat, slide the seat forward and tip the backrests forward.



**Step 30. Driver & Passenger Top/DT&PT:**

Tuck the hook Velcro™ into the seat, slide the seat forward and tip the backrests forward.



**Step 31. Driver & Passenger Top/DT&PT:**  
Take the tucked edge and pull it tight. Now, take the hooked Velcro™ from the hole and connect it to the Velcro on the tucked edge.



**Step 32. Driver & Passenger Top/DT&PT:**  
Take the angled Velcro™ from the tucked edge and pull it up to the fuzz near each of the holes.



**Step 33. Driver & Passenger Top/DT&PT:**  
Pull the flap back down and take those elastics with the plastic hooks and reattach them to the bar you previously unhooked them from.



**Step 34. Driver & Passenger Top/DT&PT:**  
Lastly, take the cover's flap and pull down tight as you attach it to the seats flap. Congrats! You have completed your installation.