

2021-2024 F-150 Bucket Seats




Step 1. Prepare the seats for installation.

Push the seatbelts located on the inside next to the console thru the elastic on the seat. Lifting electrically controlled seats all the way up will make installing the seat cover easier.



Step 2. Headrests/H:

All the parts of the seat cover are labeled inside. Use the Seat Cover Part ID chart to ID parts. Slide the headrest covers on with the extending hook (sticky) Velcro™ to the front.

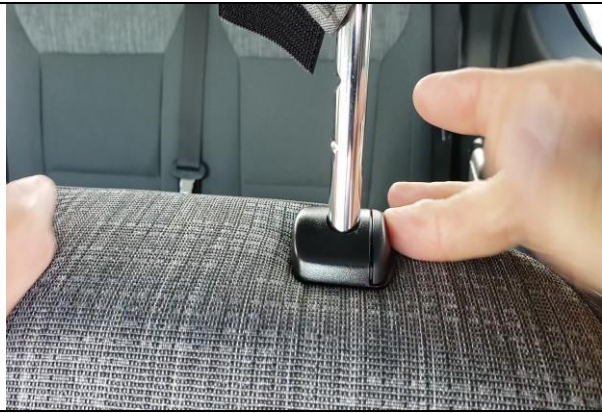

Step 3. Headrests/H:

Recline the backrest and remove the headrest by depressing the push button release on each side until they come out.



Step 4. Headrests/H:

Line up the seams of the cover to the seams of the headrest, they should closely match. Pull the Velcro™ tight and tuck it under the back edge and press it to the loop Velcro™ sewn inside the back edge.



Step 5. Driver & Passenger Bottom/DB&PB:

Remove the plastic buckles from the back edge of the seat cover.



Step 6. Driver & Passenger Bottom/DB&PB:

Slide the covers on with the extending hook Velcro™ to the front. On the inside edge of the seat is some hook Velcro. Tuck the side of the seat down and attach the Velcro to the carpeting on the side of your seat.



Step 7. Driver & Passenger Bottom/DB&PB:
Take the outside edge of the cover and tuck it behind the plastic.



Step 8. Driver & Passenger Bottom/DB&PB:
Line up the front seam, and left and right. Once everything looks good, tuck in the back edge all the way.




Step 9. Driver & Passenger Bottom/DB&PB:
Electric controlled seats, lift the seat up as high as it goes, freeing a path to route the Velcro™. Fold the front hook Velcro™ in half lengthwise with the sticky facing in. This will stiffen the Velcro™ and make it easier to route under the seat.



Step 10. Driver & Passenger Bottom/DB&PB:
Route the Velcro™ directly under the seat, making sure you avoid any wiring.



Step 11. Driver & Passenger Bottom/DB&PB:
Pull the carpeted panel away from the back edge of the seat and connect the front hook Velcro™ to the loop (fuzzy) Velcro™ in back, making sure they connect on the far left and right side of the back edge.

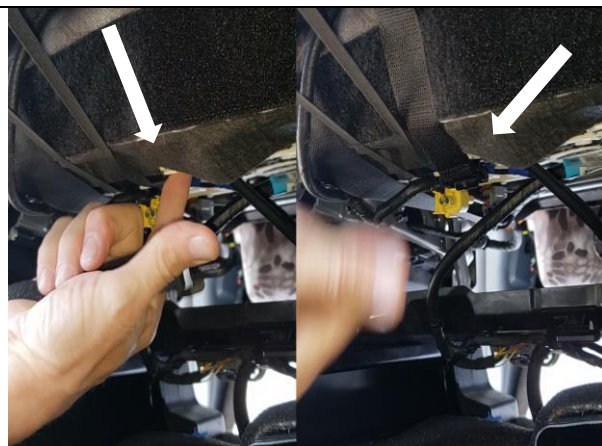

Step 12. Driver & Passenger Bottom/DB&PB:
Connect the two plastic buckles where shown to the plastic brace, then connect them to the loop Velcro™ on the back edge. This will hold the seat cover in place.



Step 13. Driver & Passenger Top/DT&PT:
Provisions are made for the side impact airbags. It is critical to get the covers on the correct side.
The covers are marked on the inside front right "DT & PT" for Driver & Passenger Tops. Also note, the Driver Top has our Headwaters Seat Cover label on the backside. Slide the covers on with "DT & PT" to the front.



Step 14. Driver & Passenger Top/DT&PT:
Tuck the fabric under the plastic for the headrests, starting with the push button side as shown. Form the top of the seat cover to the top of the seat and line up the seams on left and right.



Step 15. Driver & Passenger Top/DT&PT:
Recline the backrest, and grab the front of the seat cover as shown, pulling it down hard in the area where the big hook Velcro™ is sewn on.



Step 16. Driver & Passenger Top/DT&PT:
While holding the seat cover tight. First press the two big hook Velcro™ to the fuzzy carpet on the front edge, then press the two small outside Velcro™ to the fuzzy carpet. You may have to reconnect the Velcro™ for the best fit.



Step 17. Driver & Passenger Top/DT&PT:
Pull the seat cover down in back, pressing the hook Velcro™ onto the fuzzy carpet on the back edge of the seat.



Step 18. Lid/L:
Carefully open the Velcro™ and place the cover on. Next, open the console and connect the Velcro™ as shown. Re-connect and tighten the Velcro™ for the best fit.