


1997-2002 Jeep Wrangler Rear Bench Installation



Step 1. Top/T:
Both parts of the seat cover are labeled inside. "T" is the Top, and "B" is the bottom. Carefully open the bottom and sides of the seat cover top. Slide it on with the 3" extending hook Velcro™ to the front.



Step 2.
Work the seat cover fabric inside the cover from thumb to forefinger around the top and front side, then the other way going around the back corners and along the top edge.

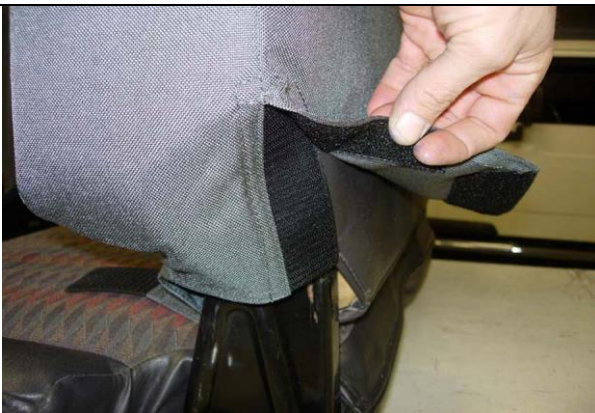

Step 3.
Mate the Velcro™ on both left and right sides.



Step 4.
Start on top and work your way to the bottom.



Step 5.
Tuck the hook Velcro into the front of the seat.



Step 6.
Use one hand to pin the Velcro to the seat back, then press the loop Velcro onto it with the other hand.



Step 7.

Work your way from one side to the other. Tighten them up by using one hand in a smoothing action from top to bottom down the front of the cover, then re-connect the Velcro™ to smooth out any wrinkles.



Step 8.

Place the seat covers on with the letter "B" to the back. Curl the sides and front of the seat cover inside out so it doesn't stick to the carpet before you want it to.



Step 9.

Form the seat cover around the front corners.



Step 10.

Then, tuck the cover around the back corners.



Step 11.

Line up the cut-outs on left and right as shown.



Step 12.

Connect the Velcro™ to the carpet on one side by pulling back slightly and pressing it down.



Step 13.

Work your way around the front of the seat, then do the other side.



Step 14.

The cover should look like this after sticking the Velcro™ to the carpet on the front and sides.



Step 15.

Tuck the seat cover into the back edge of the seat.



Step 16.

Pull the cover through to the back. Then, like Step 7, use one hand in a smoothing action from the front of the seat to the back while connecting the Velcro™ to the carpet on the seat. Start on one side, moving to the other.