

## 2003-06 Jeep Wrangler Rear Bench Seat Installation



### Step 1. Bottom/B:

Remove the seat from the Jeep and place on a table. All the parts of the seat cover are labeled inside. Use the seat cover piece identification chart to ID parts. Place the cover on with the extending hook Velcro™ to the front.



### Step 2. Bottom/B:

Line up the seams of the seat cover to the seams of your seat, they should match closely. Work the seam fabric inside the seat cover outward, or from forefinger to thumb, around the sides and front.




### Step 3. Bottom/B:

Pull the sides of the seat cover down and back, holding it temporarily with the Velcro™ onto the carpet on the seat.



### Step 4. Bottom/B:

Tuck the back edge of the seat cover in, but don't stick it down yet.

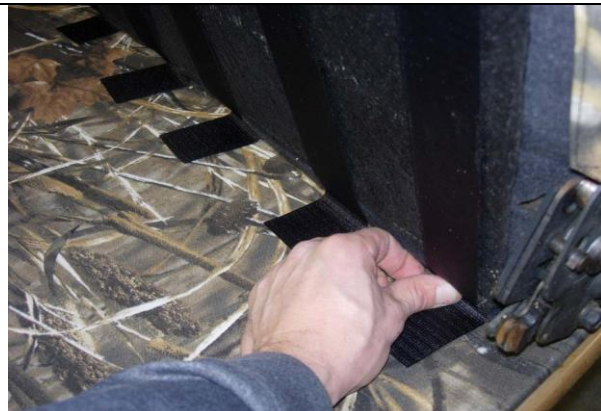

### Step 5. Bottom/B:

Route the long front Hook Velcro™ under the seat, and press it onto the carpet under the seat



### Step 6. Bottom/B:

Flip the seat down and finish pressing the Velcro™ the carpet.





**Step 7. Bottom/B:**  
Reposition and fasten the Velcro™ on each side.



**Step 8. Bottom/B:**  
Lastly, pull the cover back from behind the seat, and press the Velcro™ to the carpet on the seat.



**Step 9. Top/T:**  
Slide the cover on with the extending hook Velcro™ to the front.



**Step 10. Top/T:**  
With the cover pulled into position, tuck the front left and right sides in.



**Step 11. Top/T:**  
Tuck the cover into the recessions on the front of the cover.



**Step 12. Top/T:**  
Loosen the Phillips screws on the plastic and tuck the fabric under the plastic.





**Step 13. Top/T:**

Carefully use a screw driver to tuck the fabric into the tight spots. Tighten the screws back up.



**Step 14. Top/T:**

Tuck the front of the seat cover in and fold the backrest down. Align the seams of the seat cover as in Step 2.



**Step 15. Top/T:**

Align the cover to accommodate the opening for the child restraints.



**Step 16. Top/T:**

Press the Velcro™ onto the carpet behind the metal restraint.



**Step 17. Top/T:**

Connect the Velcro™ by using one hand in a smoothing action down the seat cover from top to bottom, while pulling on the Velcro from the back, pressing it onto the carpet.



**Step 18. Top/T:**

Press the side Velcro™ to the carpet on the side of the seat.



**Step 19. Top/T:**

Lastly, pull the back edge down and press the Velcro onto the carpet on the back of the seat.



**Step 20.**

**Congratulations, you're done!**

The seat cover will remain in place and handle anything you can dish out.