

2004-2008 F-150 Super Cab Rear 60/40 Installation



Step 1. Top/T:

Remove the headrests by lifting them up all the way using the push button release on the right side. Next, use gentle upward pressure and depress the semi-hidden push button release on the left.



Step 2. Top/T:

All the parts of the seat cover are labeled inside. Use the seat cover piece identification chart to ID parts. Slide the seat cover behind the seat belt, over the top of the seat and tuck the fabric under the plastic box for the seatbelt, and connect the Velcro™ behind it.



Step 3. Top/T:

Tuck the fabric under the plastic for the headrests and slide the seat cover behind the top of the seat.




Step 4. Top/T:

Carefully tuck the bottom of the seat cover over the child restraints located where the bottom meets the backrest.



Step 5. Top/T:

Tuck the left and right side hook (sticky) Velcro™ into the seat, lift the seat foam up and tuck the seat cover above child restraints all along the front edge. Pull the Velcro™ tight and press it to the carpet on the side of seat.

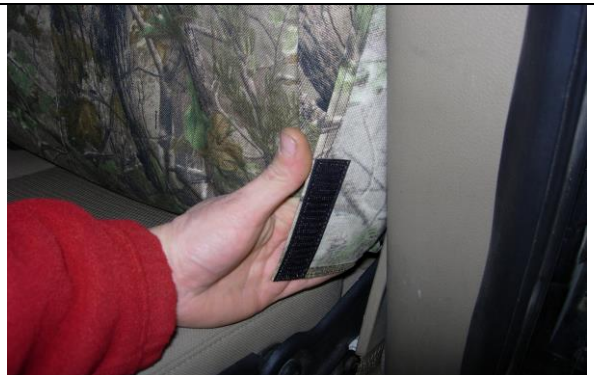

Step 6. Top/T:

Tuck the sides of the seat cover in, keeping the side Velcro™ turned away from the seat as shown. Line up the seams of the seat cover to the seams of the seat, they should closely match. Connect the side hook Velcro™ to the carpet on the seat by pushing the seat cover in and down.



Step 7. Driver & Passenger Bottoms/DB&PB:
 Remove the seatbelts from their elastic restraints. Only the two seatbelts where the seat bottoms meet need to be removed from the elastic.



Step 8. Driver & Passenger Bottoms/DB&PB:
 Slide the seat covers on with the 1" wide hook Velcro™ to the bottom as shown, but don't fasten it yet.



Step 9. Driver & Passenger Bottoms/DB&PB:
 With the seat bottom angled up slightly, carefully tuck the hook Velcro™ into the seat



Step 10. Driver & Passenger Bottoms/DB&PB:
 Move the seat up and down, tucking the Velcro™ though to the bottom. Again, line up the seams of the seat cover with the seams of your seat. Use the smoothing action on top of the seat from the front to the back and press the Velcro™ to the carpet on the seat.



Step 11. Driver & Passenger Bottoms/DB&PB:
Mate the hook Velcro™ to the bottom of the seat starting on the inside, working your way out.



Step 12. Driver & Passenger Bottoms/DB&PB:
Push the seatbelts through the elastic restraints sewn to the seat cover.



Step 13. Headrests/H:
Slide the cover on with the extending hook Velcro™ to the front. Work the material inside the cover from the forefinger to the thumb.



Step 14. Headrests/H:
Mate the hook Velcro™ in front to the loop Velcro™ sewn inside the back edge.