

## 2007-10 Jeep Wrangler 4 Door Rear 40-60 Installation



**Step 1.**  
Remove the driver's inside seatbelt from the elastic restraint.



**Step 2.**  
View from under the front of the driver's seat. Reach to the back and disconnect the small bungee cord.



**Step 3.**  
Continue pulling the disconnected bungee as shown.



**Step 4.**  
Leave the bungee attached to the seatbelt.



**Step 5. Passenger Top/PT:**  
All the parts of the seat cover are labeled on the inside right corner of each part with abbreviated small letters that are about 3/4" tall. Fold the driver seat down.



**Step 6. Passenger Top/PT:**  
Form the seat cover over the outside corner and tuck the Velcro™ under the headrest.



**Step 7. Passenger Top/PT:**  
Form the cover over the inside corner. Line up the seams of the seat cover to the seams on the seat, they should match closely.



**Step 8. Passenger Top/PT:**  
Tuck the fabric under the plastic for the center seatbelt.



**Step 9. Passenger Top/PT:**  
Tuck the fabric under the plastic of the seat release lever.



**Step 10. Passenger Top/PT:**  
Connect the Velcro™ behind the seatbelt.



**Step 11. Passenger Top/PT:**  
Connect the Velcro™ behind the top of the seat.



**Step 12. Passenger Top/PT:**  
Connect the Velcro™ down the inside edge.




**Step 13. Passenger Top/PT:**  
After the Velcro™ is connected it should look like this.



**Step 14. Passenger Top/PT:**  
Press the small hook Velcro™ to the carpet fuzz on the outside bottom corner below the nylon pull strap.



**Step 15. Passenger Top/PT:**  
Fold the seat forward and tuck the front edge in. Press the Velcro™ to the carpet on the seat.

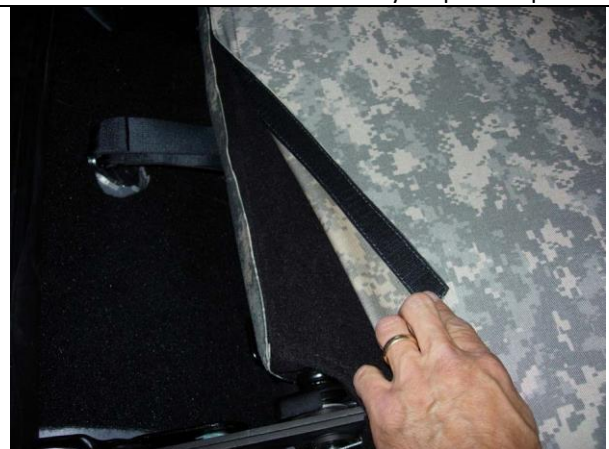

**Step 16. Passenger Top/PT:**  
Press the back edge to the carpet on the seat.



**Step 17. Passenger Bottom:**  
Place the seat cover on as shown.




**Step 18. Passenger Bottom:**  
Tuck the cover around the back outside corner of the seat.



**Step 19. Passenger Bottom:**  
Tuck the back edge of the seat cover in.



**Step 20. Passenger Bottom:**  
Pull the cover back and feed the metal loop thru the seat covers provided opening on the inside edge.

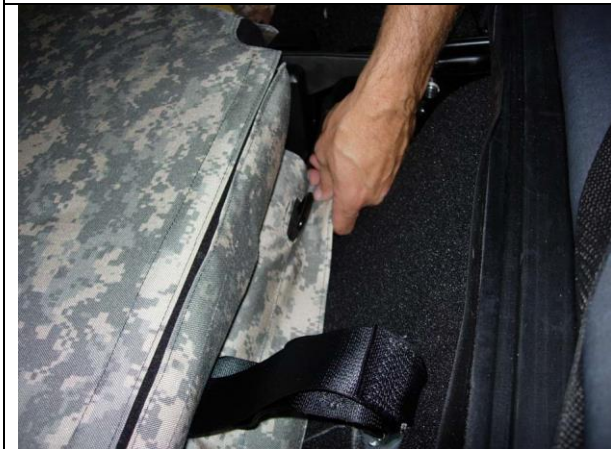

**Step 21. Passenger Bottom:**  
As in Step 20, route the metal loop thru the seat cover, then press the Velcro™ to the carpet fuzz on the back edge of the seat.



**Step 22. Passenger Bottom:**  
Likewise, press the small Velcro™ to the carpet on the back edge of the seat bottom.



**Step 23. Passenger Bottom:**  
Pull the cover around the back inside corner.



**Step 24. Passenger Bottom:**  
Press the Velcro™ to the carpet under the seat.



**Step 25. Driver Top/DT:**  
Carefully open the seat cover and slide it over the headrest.



**Step 26. Driver Top/DT:**  
Fold the passenger seat down and form the top corners of the seat cover to the seat, lining up the seams.



**Step 27. Driver Top/DT:**  
Tuck the Velcro™ under the headrest.



**Step 28. Driver Top/DT:**  
Connect the vertical Velcro™ on the inside edge.



**Step 29. Driver Top/DT:**  
As in Step 11, connect the Velcro™ behind the top of the seat.



**Step 30. Driver Top/DT:**  
Same as Step 15 & 16, connect the Velcro™ to the carpet on the seat.



**Step 31. Driver Bottom/DB:**  
Place the cover on same as Step 17, press the Velcro™ to the carpet under the seat, and front and back edge.



**Step 32. Driver Bottom/DB:**  
Tie one of the Cordura straps the cover was sent with to the elastic on the seatbelt.



**Step 33. Driver Bottom/DB:**  
Re-route the bungee cord thru the metal loop on the back of the seat and tuck the Cordura strap under the seat..



**Step 34. Driver Bottom/DB:**  
From under the front of the seat, use the Cordura strap to pull the bungee cord into place and attach it, remove the Cordura strap.



**35. Headrests/H:**  
Slide the headrest cover on with the extending Velcro™ to the front, line up the seams.



**36. Headrests/H:**  
Tuck it under the headrest and connect it to the loop Velcro™ sewn inside the back edge.