

2007-10 Jeep Wrangler 4 Door Rear 40-60 Installation



Step 1.
Remove the driver's inside seatbelt from the elastic restraint.



Step 2.
View from under the front of the driver's seat. Reach to the back and disconnect the small bungee cord.



Step 3.
Continue pulling the disconnected bungee as shown.



Step 4.
Leave the bungee attached to the seatbelt.



Step 5. Passenger Top/PT:
All the parts of the seat cover are labeled on the inside right corner of each part with abbreviated small letters that are about 3/4" tall. Fold the driver seat down.



Step 6. Passenger Top/PT:
Pull the nylon seat release tab thru the seat cover.




Step 7. Passenger Top/PT:
Form the seat cover over the outside corner and tuck the Velcro™ under the headrest.



Step 8. Passenger Top/PT:
Form the cover over the inside corner. Line up the seams of the seat cover to the seams on the seat, they should match closely.



Step 9. Passenger Top/PT:
Tuck the fabric under the plastic for the center seatbelt.

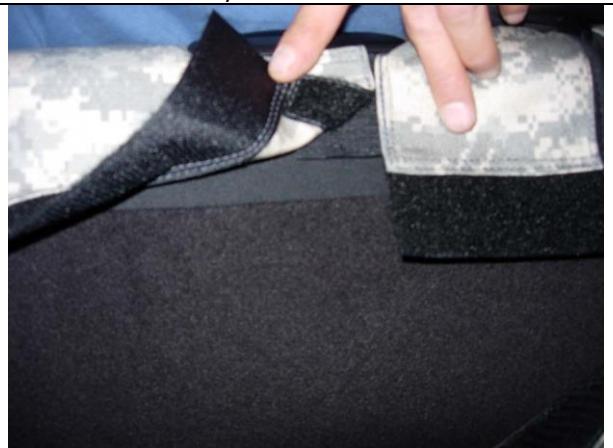

Step 10. Passenger Top/PT:
Connect the Velcro™ behind the seatbelt.



Step 11. Passenger Top/PT:
Connect the Velcro™ behind the top of the seat.




Step 12. Passenger Top/PT:
Connect the Velcro™ down the inside edge.



Step 13. Passenger Top/PT:
After the Velcro™ is connected it should look like this.



Step 14. Passenger Top/PT:
Press the small hook Velcro™ to the carpet fuzz on the outside bottom corner below the nylon pull strap.

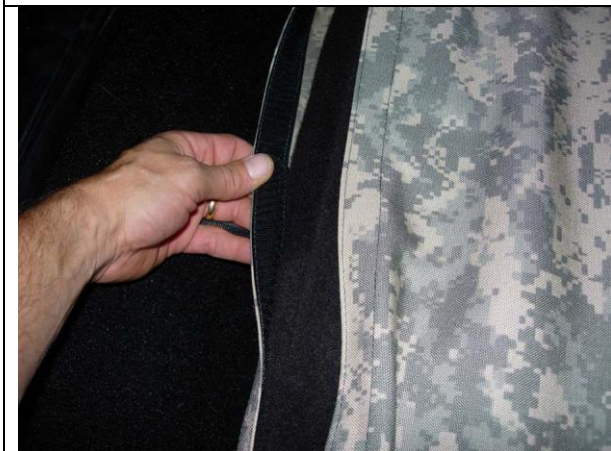

Step 15. Passenger Top/PT:
Fold the seat forward and tuck the front edge in. Press the Velcro™ to the carpet on the seat.



Step 16. Passenger Top/PT:
Likewise with the back edge, press it to the carpet.



Step 17. Passenger Bottom:
Place the seat cover on as shown.




Step 18. Passenger Bottom:
Tuck the cover around the back outside corner of the seat.




Step 19. Passenger Bottom:
Tuck the back edge of the seat cover in.



Step 20. Passenger Bottom:
Pull the cover back and feed the metal loop thru the seat covers provided opening on the inside edge.

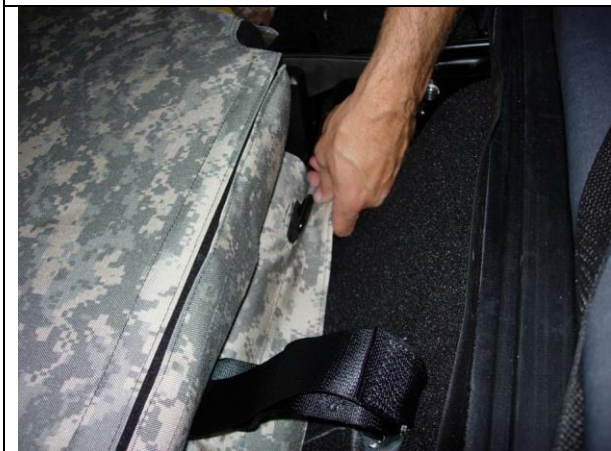

Step 21. Passenger Bottom:
As in Step 20, route the metal loop thru the seat cover, then press the Velcro™ to the carpet fuzz on the back edge of the seat.

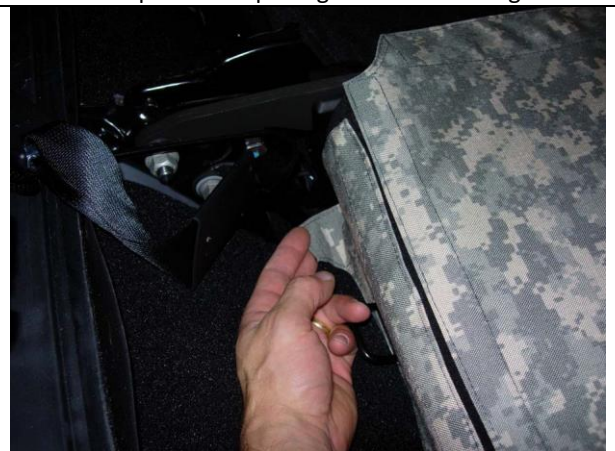

Step 22. Passenger Bottom:
Likewise, press the small Velcro™ to the carpet on the back edge of the seat bottom.



Step 23. Passenger Bottom:
Pull the cover around the back inside corner.



Step 24. Passenger Bottom:
Press the Velcro™ to the carpet under the seat.



Step 25. Driver Top/DT:
Carefully open the seat cover and slide it over the headrest.



Step 26. Driver Top/DT:
Fold the passenger seat down and form the top corners of the seat cover to the seat, lining up the seams.



Step 27. Driver Top/DT:
Tuck the Velcro™ under the headrest.



Step 28. Driver Top/DT:
Connect the vertical Velcro™ on the inside edge.



Step 29. Driver Top/DT:
As in Step 11, connect the Velcro™ behind the top of the seat.



Step 30. Driver Top/DT:
Same as Step 15 & 16, connect the Velcro™ to the seat carpet.



Step 31. Driver Bottom/DB:

Place the cover on same as Step 17, press the Velcro™ to the carpet under the seat, and front and back edge.



Step 32. Driver Bottom/DB:

Tie one of the Cordura straps the cover was sent with to the elastic on the seatbelt.



Step 33. Driver Bottom/DB:

Re-route the bungee cord thru the metal loop on the back of the seat and tuck the Cordura strap under the seat..



Step 34. Driver Bottom/DB:

From under the front of the seat, use the Cordura strap to pull the bungee cord into place and attach it, remove the Cordura strap.



35. Headrests/H:

Slide the headrest cover on with the extending Velcro™ to the front, line up the seams.



36. Headrests/H:

Tuck it under the headrest and connect it to the loop Velcro™ sewn inside the back edge.