


2017-2022 F-250-550 Super Cab rear 60-40 No Latch Install




Step 1. Headrests/H:

All the parts of the seat cover are labeled inside on the bottom right side. Slide the headrest covers on with the extending hook (sticky) Velcro™ to the front.

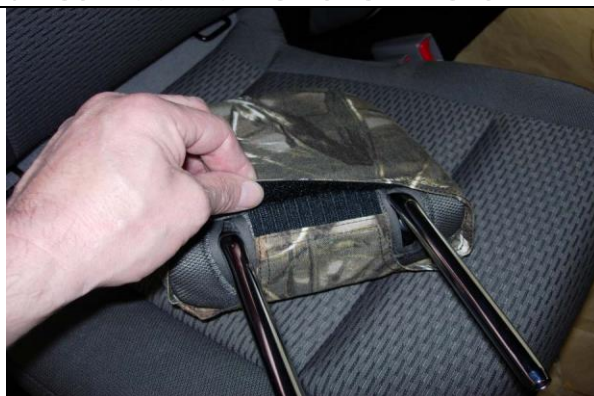

Step 2. Headrests/H:

Form the cover to the headrest by lining up the seams of the cover to the seams on the headrest, they should closely match.

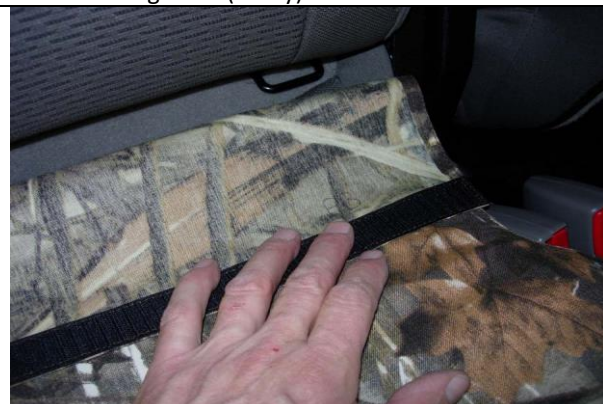

Step 3. Driver & Passenger Bottoms/DB&PB:

Slide the seat covers on with the letters DB & PB to the top. Note the 2017 models have extending hook Velcro™.



Step 4. Driver & Passenger Bottoms/DB&PB:

Again, line up the seams of the seat cover to the seams of the seat.



Step 5. Driver & Passenger Bottoms/DB&PB:

Tuck in the top side, lift the seat bottom up, pull it tight, and press the hook Velcro™ to the fuzzy carpet on the underside of the seat. Lastly, pull the bottom side tight and connect the Velcro™ to the carpet fuzz as shown.



Step 6. Driver & Passenger Top/DT&PT:

Release the driver side backrest by lifting the seat bottom up all the way. Feel for the nylon webbing pull tab behind the top of driver side down about six inches and pull it up until the seat releases. The passenger side backrest has an exposed nylon release strap that can be seen on Step 11.



Step 7. Driver & Passenger Top/DT&PT:

First, slide the seat cover over the outside part of the seat on the outside edge of the seat. This is a flap that hangs down past the pivot point. The seat cover has a pocket that'll slip right over it.



Step 8. Driver & Passenger Top/DT&PT:

Tuck the seat cover under the plastic for the headrests starting with the push button release.




Step 9. Driver & Passenger Top/DT&PT:

Tuck in the front edge of the seat cover and fold the backrest forward. Make sure to pull the cover down far enough that the rounded bottom left and right corners are forming to the bottom of the backrest.



Step 10. Driver & Passenger Top/DT&PT:

Connect the outside edge 1"X12" hook Velcro™ to the loop Velcro sewn inside the seat cover on the left and right side.

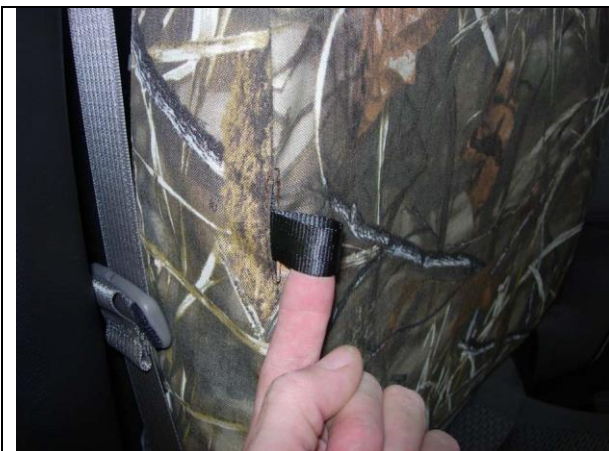

Step 11. Passenger Top/PT:

Feed the nylon seat release trap through the provided opening.



Step 12. Driver & Passenger Top/DT&PT:

Connect the long hook Velcro™ to the loop Velcro™ sewn inside the top edge as shown. Do this by gently pulling on the long hook Velcro™ with one hand while using the other hand in a smoothing action down the front of the seat from top to bottom. This will tighten the cover up nicely.



Step 13. Driver Top/DT:

Make sure the driver side back wall catch is positioned where shown. Lift the driver side seat bottom up all the way and push the backrest in until you hear it click back in. This may take a few tries to get it done.

**Congratulations!!
You're done!!!**

**Call 877-485-3001 8am-5pm
MST M-F for help if needed.**