

2018 Jeep Wrangler JL 40/60 with Arm Installation



Step 1. H/Headrests:

All the pieces are labeled on the inside of the cover with a letter representing what piece it is. Take the headrest covers and pull them over the headrests with the extending Velcro on the front. Take the front flap and wrap it under the headrest and connect it to the back of the cover.



Step 2. DT/Driver Top:

Detach all the Velcro of the cover.



Step 3. DT/Driver Top:

Pull the cover over the seat, feeding the headrest through the hole at the top.



Step 4. DT/Driver Top:

Pull the cover down tight, forming it to the rest of the seat. Take the flap hanging from the top of the cover and feed it under the headrest.



Step 5. DT/Driver Top:
Pull the flap tight and connect it to the Velcro on the back of the cover.



Step 6. DT/Driver Top:
Take a non-serrated butter knife or other flat and smooth object and tuck the cover under the release levers on the shoulder of the seat. Be careful to not be too aggressive, you don't want to break your plastic.




Step 7. DT/Driver Top:
Take the bottom of the cover and tuck it in-between the backrest and seat bottom toward the rear.



Step 8. DT/Driver Top:
Fold your seat down. You can now tuck the cover under the restraints if you chose to have them exposed.



Step 9. DT/Driver Top:
Take the side Velcro, pull it tight, and connect the side and back together.

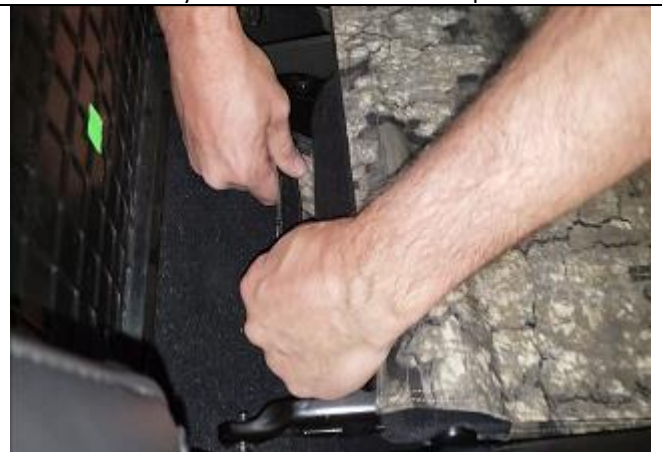

Step 10. DT/Driver Top:
Take the cover that you pushed through from the front pull it up tight and connect it to the fuzzy carpeting on the seat.



Step 11. DT/Driver Top:

Connect the rest of the cover to the fuzzy material on the seat.



Step 12. DB/Driver Bottom:

Take the driver bottom cover and place it into the seat. Form the cover to the seat. Notice the seatbelt buckle is tethered by an elastic band. Lift the buckle and elastic band up. Tuck the back of the cover between the backrest and seat bottom.



Step 13. DB/Driver Bottom:

Take the Velcro along the front of the cover and attach it to the carpeting under the seat.



Step 14. DB/Driver Bottom:

Continue forming the cover to the seat. Remember to line the seam of the cover up with the seam of the seat. Push down the side of the sides of the cover.



Step 15. DB/Driver Bottom:

Attach the Velcro from the sides under the seat.



Step 16. DB/Driver Bottom:


Lay the seat down and reach around the back of the seat. Grab the cover that you fed through and attach it to the carpet of the seat.



Step 17. DB/Driver Bottom:
Should look as shown in the picture.



Step 18. PB/Passenger Bottom:
The passenger seat installs the same way just bigger and without the seatbelt's elastic strap.

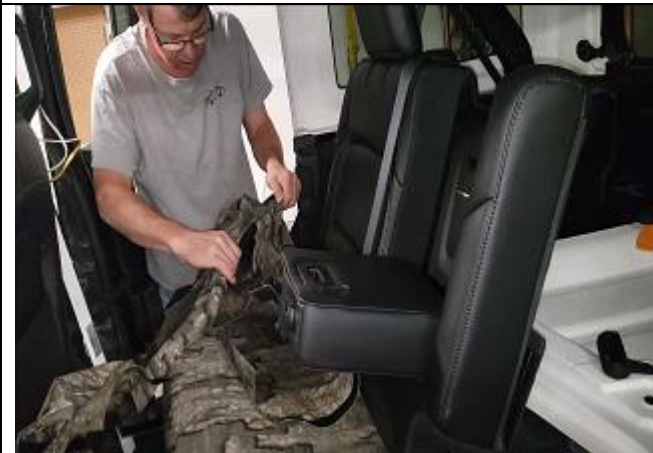

Step 19. PT/Passenger Top:
Undo all the Velcro on the cover.



Step 20. PT/Passenger Top:
Pull the seatbelt away from the seat and pass the cover under the seatbelt.



Step 21. PT/Passenger Top:
Hook the corner of the cover around the corner of the seat and wrap the cover around the rest of the seat.



Step 22. PT/Passenger Top:
Similar to steps 4 and 5. Feed the front flap under the headrest, pull it tight and connect it to the back flap. You can also tuck the cover under the release levers on the corner of the seat.



Step 23. PT/Passenger Top:
Pull the rest of the cover around the corner.



Step 24. PT/Passenger Top:
Hold all the Velcro down flat against the back of the seat.




Step 25. PT/Passenger Top:
As you hold them down connect the rest of the back flap to the Velcro that is folded over.



Step 26. PT/Passenger Top:
Notice the Velcro lining the rest of the cover and press it against the carpet on the back of the seat.



Step 27. PT/Passenger Top:
Find the area on the front of the cover with extending Velcro and tuck it under the armrest.

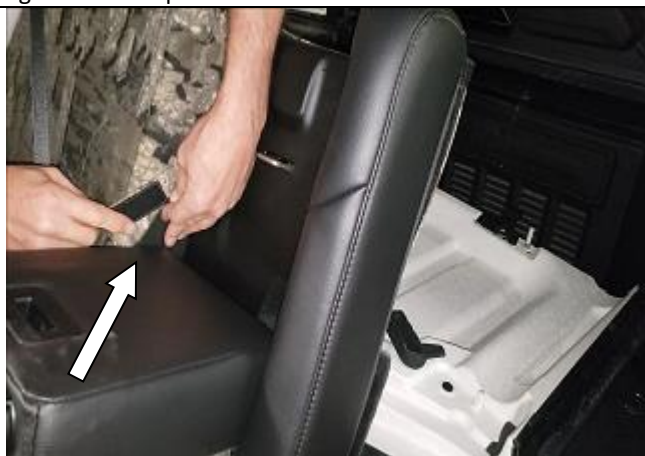

Step 28. PT/Passenger Top:
Take the extending Velcro closest to the passenger door and connect it to the Velcro on the side of the seat.



Step 29. PT/Passenger Top:
Take the last part of the top and pull it over the last side of the seat.



Step 30. PT/Passenger Top:
Pull the cover down and wrap the Velcro hanging off the side around the back. Connect the rest of the back flap to the Velcro.



Step 31. PT/Passenger Top:
Now connect the other extending Velcro that's behind the armrest to the other side of the seat.



Step 32. PT/Passenger Top:
Tuck the bottom of the cover in-between the backrest and the bottom toward the rear.



Step 33. PT/Passenger Top:
Fold the seat down and tuck the cover around the restraint if exposed. Then grab the tucked cover, pull tight, and connect it to the fuzzy carpet.



Step 34. PT/Passenger Top:
Take the rest of the cover and connect it to the fuzzy carpeting.



Step 35. A/Armrest:
 If you haven't already, remove the middle headrest by pushing the buttons on the headrest plastics and pulling it out of the armrest. Fold the armrest down and pull the cover onto it. Make sure the opening is on top.



Step 36. A/Armrest:
 Before you pull the cover all the way on, find the little space in the seam of the cover and feed the armrest strap through it. Then pull it down tight. Poke the headrest plastics through the provided openings. Make sure that when you poke them through start on the side with the buttons. If you pull the cover over the plastics the other way you risk breaking them.



Step 37. A/Armrest:
 Tuck the bottom of the cover under the armrest and around the corners.



Step 38. A/Armrest:
 Hold the Velcro you tucked in the last step against the armrest. Then take the top flap of the cover and connect the Velcro.



Step 39. A/Armrest:
 Tuck the cover under the latch opening.




Step 40. MH/Middle Headrest:
 Fit the cover over the bottom of the headrest/drink holder. Make sure the cut outs are on the side with the headrest pegs.



Step 41. MH/Middle Headrest:

Tuck all the edges of the cover into the plastic around the entire headrest. There is rope in the material that will hold the cover on and prevent it from popping off.

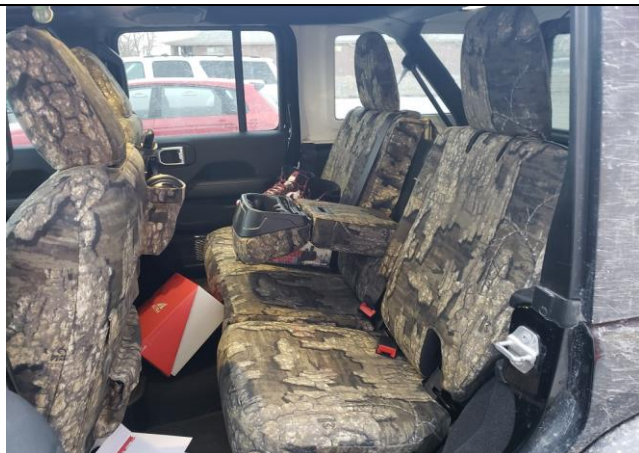

Congratulations!

Your cover is now installed! If you need any more install help, please reference or install video at:

https://youtu.be/nTt45HIE_hQ