

2023-2024 F-250-550 Super Cab rear 60-40 Installation



Step 1. DT Prep:

Before we start with installing the headrests, we suggest you release your driver and passenger tops. This will give you enough space to get around the headrest. The driver side release tab is behind the backrest.



Step 2. DT Prep:

Reach behind the backrest and feel for some nylon webbing and pull on it to release the backrest.



Step 3. PT Prep:

The nylon webbing on the passenger side is located on the side of the seat.



Step 4. Headrests/H:

All the parts of the seat cover are labeled inside on the bottom right side. Slide the headrest covers on with the extending hook (sticky) Velcro™ to the front.



Step 5. Headrests/H:

Push both the headrest buttons in and take the headrest out evenly.



Step 6. Headrests/H:

Form the cover to the headrest by lining up the seams of the cover to the seams on the headrest, they should closely match. Connect the Velcro™ as shown.



Step 7. Driver & Passenger Top/DT&PT:
Slide the cover over the seat with the extending Velcro™ to the front.
***Driver Top, pull the seatbelt away from the seat and tuck the cover under the seatbelt.**



Step 8. Driver & Passenger Top/DT&PT:
Tuck the seat cover under the plastic for the headrests starting with the push button release side first.



Step 11. Passenger Top/PT:
Feed the nylon seat release trap through the provided opening.



Step 10. Driver & Passenger Top/DT&PT:
Tuck in the front edge of the seat cover and fold the backrest forward. Make sure to pull the cover down far enough that the rounded bottom left and right corners are forming to the bottom of the backrest.



Step 11. Driver & Passenger Top/DT&PT:
Connect the long hook Velcro to the loop Velcro sewn inside the top edge. Do this by gently pulling on the Velcro with one hand while using the other hand in a smoothing action down the front of the seat from top to bottom. This will tighten the cover up nicely.



Step 12. Driver & Passenger Top/DT&PT:
Connect the outside hook Velcro™ to the loop Velcro™ sewn inside the seat cover on the left and right side.



Step 13. Driver & Passenger Bottoms/DB&PB:
Slide the cover over the seat with the extending hook Velcro™ on top.



Step 14. Driver & Passenger Bottoms/DB&PB:
Route the nylon seat release strap through the provided opening.




Step 15. Driver & Passenger Bottoms/DB&PB:
Tuck the top side in.



Step 16. Driver & Passenger Bottoms/DB&PB:
Lift the seat bottom up, pull the Velcro™ snug, and press the hook Velcro™ to the fuzzy carpet on the underside of the seat.



Step 17. Driver & Passenger Bottoms/DB&PB:
Attach the side Velcro™ under the seat to the fuzzy carpet under the seat bottom.

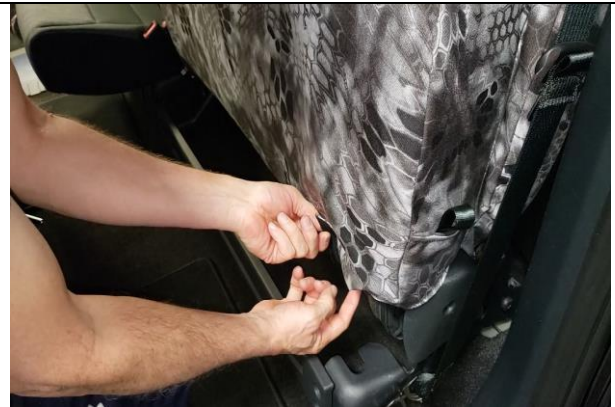

Step 18. Driver & Passenger Bottoms/DB&PB:
Lastly, pull the bottom side tight and connect the Velcro™ to the carpet fuzz as shown.