

1998-2000 Ford Ranger 60-40 w/ Console Installation



Step 1.
Temporarily remove the recline lever using a Allen wrench to push the clip and release it from the shaft.



Step 2.
This is a view from inside the handle. Note how the Allen wrench needs to be angled slightly to one side. Hold one hand in front of the clip so it doesn't go flying. Wiggle the handle off, put the clip back on and set the handle aside.



Step 3. Driver & Passenger Top/DT&PT:
All the parts of the seat cover are marked inside the seat cover on the front right hand corner. Slide the cover on with the extending hook (sticky) Velcro™ to the front and the long strip of hook Velcro™ (shown) to the back. Turn the backside Velcro™ inside out in order to help you slide it down.



Step 4. Driver & Passenger Top/DT&PT:
Work the top of the seat cover by lining up the seams of the seat cover to the seams of your seat, they should match closely. Manipulate the material inside the seat cover from thumb to forefinger, working it to the middle. Align the side seams of the seat cover along the right and left side of the seat.



Step 5. Driver & Passenger Top/DT&PT:
Tuck the front edge in and press the Velcro™ to the carpet on the backside of the seat.



Step 6. Driver & Passenger Top/DT&PT:
Lastly, pull the back edge down and press the Velcro™ to the carpet on the seat.



Step 7. Passenger Bottom/PB:
Place the seat cover over the opening for the inside edge seat belt.



Step 8. Passenger Bottom/PB:
Pull the seat cover back and as in Step 4, line up the seams of the seat cover to the seams of the seat.



Step 9. Passenger Bottom/PB:
Line up the hole for the recline lever.



Step 10. Passenger Bottom/PB:
Pull the seat cover around to the back and press the hook Velcro™ to the carpet on the seat. Put the recline lever back on.



Step 11. Passenger Bottom/PB:
Lift the hook Velcro™ away from the carpet on the side of the seat.



Step 12. Passenger Bottom/PB:
Pull the inside around to the back hard, then press the hook Velcro™ onto the seat in back as shown.



Step 13. Passenger Bottom/PB:
Slide the side hook Velcro™ over the seat slides.



Step 14. Passenger Bottom/PB:
Route them at an angle to the back edge and press them onto the carpet. Reconnect the outside edge of the seat and slide your hand along the recline lever to smooth the outside edge of the seat cover.




Step 15. Passenger Bottom/PB:
Tuck in the back edge of the seat cover.



Step 16. Passenger Bottom/PB:
Pull the rearmost edge of the seat cover back hard and press it onto the carpet on the back edge.



Step 17. Driver Bottom/DB:
Follow Steps 8-16, except for 7&12. Shown is the notched out area on the right leg of the driver. Press the hook Velcro™ to the carpet on the seat.

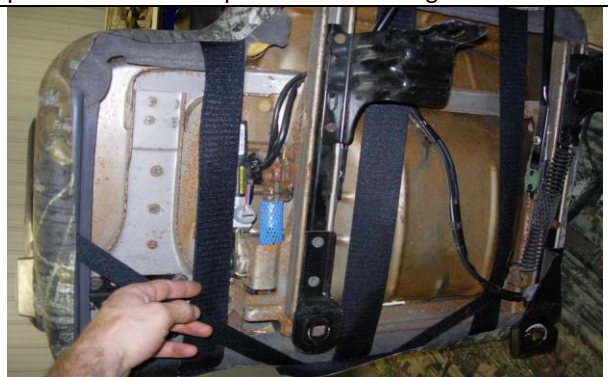

Step 18. Driver Bottom/DB:
Note how the Velcro™ are routed under the seat.



Step 19. Driver Bottom/DB:

Lastly, pull the inside edge of the seat cover back and connect the Velcro™ as shown.



Step 20. Console/C:

Place the console cover on in the up position, then fold it down. Note, the picture shows a 2001-03 Ranger Console. 1998-2000 Ranger 60-40 doesn't have a single cup holder on the right front corner.



Step 21. Console/C:

Pull the cover up to the edge of the opening. Note the areas where the Velcro™ will lay inside.



Step 22. Console/C:

Clean those areas with rubbing alcohol by scrubbing hard, then wipe clean while it's still wet in order to remove the residue from the cleaning.



Step 23. Console/C:

Peel the backing off the adhesive Velcro™ and press them onto the plastic hard. If they don't stick, re-clean the areas. Extra adhesive Velcro™ is provided.



Step 24. Lid/L:

Connect the Velcro™ under the lid. You can pull pretty hard on the Velcro™ to tighten them up. You'll want them plenty tight to hold the cover in place.