

2005-2012 Colorado 60-40 w/ Console Installation



Temporarily remove the recline and access lever from the driver and passenger seats using a Torx 20 bit. All of the parts of the seat cover are labeled inside. Use the seat cover Piece Identification Chart to ID the different parts of the seat cover.



Next, temporarily remove the lumbar knob from the driver's side by gently wiggling it off, either up and down, or side to side. Remove the plastic drink holders on the front of the seat by lifting up the plastic release under the front, and sliding the unit forward.



1. Lid/L:
Pull the lid cover on with the "L" labeled inside to the back, or hinge area with the console down. Try to line up the seams of the lid cover to the seams of the lid itself, they should match closely.



2. Lid/L:
Open the lid and connect the Velcro™ under the lid. Use a sawing motion while moving the lid to get the rear Velcro™ into the hinge. Make sure the Velcro™ are straight and positioned correctly, unlike the lid cover in the photo. It needs to be rotated clockwise slightly.



3. Console/C:

Place the cover on with the console in the up position, tucking it in around the hinge area, use one hand to hold it in place, fold it down, and then open it.



4. Console/C

Pull the material up flush to the front edge, all the way down both sides, and around the hinge area again.



5. Console/C

While holding on to the front, pull the back edge up to the hinge.



6. Console/C

Connect the side to side Velcro™ as tight as you can get them as shown.



7. Console/C

Use a sawing motion while moving the lid back and forth to slide the rear Velcro™ into the hinge. Tip the loop Velcro™ into the console and note the areas where the adhesive hook Velcro™ will adhere.



8. Console/C

Clean the areas clean with rubbing alcohol by scrubbing hard, then wiping it dry while it's still wet with a paper towel. Pull the fabric up flush with the edge, peel off the plastic, sticking the front adhesive Velcro™ first, then the rear, and lastly the sides.



9. Driver Bottom/DB:

Place the seat cover on with the long hook (sticky) Velcro™ to the front. Line up the holes provided for the recline lever and lumbar knob, then connect the outside edge of the seat cover with hook Velcro™ sewn inside, to the carpet on back of the seat bottom.



10. Driver Bottom/DB:

Put the lumbar knob back, lining up the grooves on the knob to the grooves on the hollow shaft. Put the recline lever back on using the Torx 20 bit. Use the recline lever to move the backrest forward as needed while installing the seat cover to make things easier.




11. Driver Bottom/DB:

Form the seat cover to the notch area as shown, forcing the material inside the seat cover to the outside edge.



12. Driver Bottom/DB:

Form the seat cover to the inside corner as shown, and continue to work the material inside the seat cover outward.

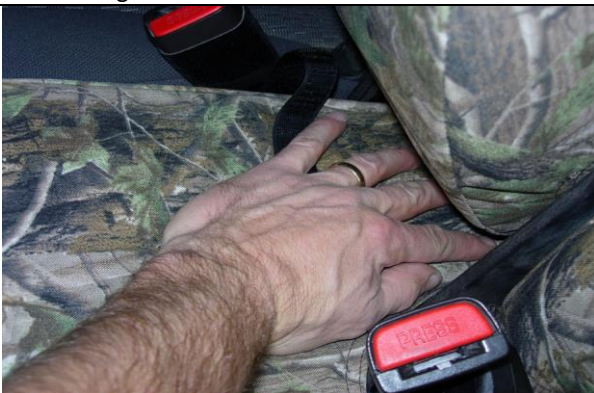

13. Driver Bottom/DB:

Tuck the cover under the console, temporarily connecting the hook Velcro™ to the carpet fuzz on the back edge of the seat bottom, but not all the way.



14. Driver Bottom/DB:

Tuck the long hook Velcro™ in on the left side, and poke it through to the back. Folding it in half length wise helps stiffen it up and makes it a little easier.



15. Driver Bottom/DB:
Route the outside edge front Velcro™ similarly to the back, connecting them to the carpet on the back edge of the seat. Route the remaining front hook Velcro™ under the front of the seat, avoiding any seat mechanisms, also connecting them to the carpet on the back edge. See step 17.



16. Driver Bottom/DB:
Route the outside edge Velcro™ up where shown, over the top of the seat slide, and angle it to the back edge.



17. Driver Bottom/DB:
Pull tight and connect the Velcro™ at an angle as shown.



18. Driver Bottom/DB:
Tuck the inside edge hook Velcro™ in between the seats, routing it under the plastic hinge, angling it to the back.



19. Driver Bottom/DB:
Connect it to the carpet fuzz on the back edge of the seat an angle as shown.



20. Driver Bottom/DB:
Pull the back edge down, connecting the hook Velcro™ to the carpet fuzz on the seat bottom as shown.



21. Driver Bottom/DB:

Lastly, pull the rear most part of the seat cover back while using one hand in a smoothing action on the surface of the seat from front to back, connecting the hook Velcro™ sewn inside to the carpet on the seat.



22. Passenger Bottom/PB:

Follow step 9 & 10, and then place the seat belt through the provided opening.



23. Passenger Bottom/PB:

Put the recline lever back on the seat, then connect the hook Velcro™ to the carpet as shown.



24. Passenger Bottom/PB:

Line up the seams of the seat cover to the seams of the seat, then slide your hand around the sides of the seat cover from the front of the seat to the inside edge by the seat belt, taking up slack, and then press the hook Velcro™ to the carpet fuzz as shown.



25. Passenger Bottom/PB:
As in step 21, connect the rear most part of the seat cover to the carpet fuzz on the back edge.



26. Driver & Passenger Top/DT&PT:
Slide the seat cover on partway with the extending hook Velcro™ to the front. Note how tight it goes on.



27. Driver & Passenger Top/DT&PT:
Form the top of the seat cover to the integral headrests, then form the seat cover around the shoulders of the seat by pulling down on front and back, lining up the seams, straightening if necessary.



28. Driver & Passenger Top/DT&PT:
Once the seat cover is pulled down into position, push the hook Velcro™ through to the back. Then, using one hand in a smoothing action down the front of the seat cover from top to bottom, gently pull on the Velcro™ from behind with the other hand, tightening the seat cover. Then follow the Velcro™ through to the back with the front hand, pinning it tightly to the seat, then connect it to the back loop Velcro™. Work from one side to the other. A few attempts may be needed to get it just right.