

2009-12 Dodge 40-20-40 w/opening consoles Installation



Step 1.

For video installation, follow this link:

<https://youtu.be/Mrls41Nzlws>

Prepare the driver and passenger seat for installation by temporarily removing the headrests. Recline the backrests and depress the two push button releases shown while holding gentle upward pressure.



Step 2.

(View from under the back of the seat bottom.)

Temporarily unhook both plastic pieces sewn to the elastic straps by pushing them forward. Use caution reaching under the seat and avoid sharp metal edges.



Step 3.

Remove the seat belt from the elastic on the inside edge of the driver and passenger seat bottoms.



Step 4. Driver & Passenger Bottoms/DB&PB:

All the parts of the seat cover are labeled inside. Use the Seat Cover Piece Identification Chart to ID parts. Tuck the back edge of the seat cover into the seat. Fold the front edge Velcro™ in half lengthwise, it'll be 1"X22" and stiff as a ruler (The picture does NOT show the Velcro™ folded in half). Route the Velcro™ under the front of the seat where shown, avoiding any seat mechanisms.



Step 5. Driver & Passenger Bottoms/DB&PB:
Slide the long outside edge hook Velcro™ in as shown between the plastic and the seat, then put the seat belts through the elastic on the inside of the seat cover.



Step 6. Driver & Passenger Bottoms/DB&PB:
Line up the seams of the seat cover to the seams of the seat, they should match closely. Then, tuck the outside edge in as shown.



Step 7. Driver & Passenger Bottoms/DB&PB:
If you have electric seats be sure to lift the seat up as high as it will go. This will pull everything away from your seat and free up some space. Route the long front edge hook Velcro™ to the loop Velcro™ sewn on the back edge. Make sure the Velcro is routed above any wires or bars. Route the outside edge hook Velcro™ (left) at an angle and connect it to the loop Velcro™ sewn on the back edge. Use one hand in a smoothing action from front to back along the outside edge and top of the seat cover while pulling on the back of the seat cover, then tightening the Velcro™. Note the two center Velcro™, they're from Step 9.



Step 8. Driver & Passenger Bottoms/DB&PB:
View from the inside edge of the passenger bottom. Press the two hook Velcro™ sewn inside the seat cover to the carpet on the seat. Like step 7, slide one hand from front to back along the inside edge while connecting the Velcro™ to the carpet to remove any slack in the seat cover.



Step 9. Driver & Passenger Bottoms/DB&PB:
Connect the plastic hooks under the back edge of the seat to the metal bar, and then press the hook Velcro™ to the loop Velcro™ sewn on the back edge. This will keep the seat cover from shifting around.



Step 10. Driver & Passenger Top/DT&PT:
Slide the seat covers on with the extending hook Velcro™ to the front. Tuck the fabric under the plastic on the outside edge of the seat. Like Step 6, line up the seams of the seat cover to the seams of the seat.




Step 11. Driver & Passenger Top/DT&PT:
Tuck the fabric under the plastic of the headrests starting with the push button side as shown.



Step 12. Driver & Passenger Top/DT&PT:
Tuck the hook Velcro™ into the seat, slide the seat forward and tip the backrests forward.



Step 13. Driver & Passenger Top/DT&PT:
View from under the back of the driver seat bottom, outside edge. Route the hook Velcro™ over the metal bar that is between the back edge and the electrical plug. The same metal bar exists under the seat on the other side. Note: the Velcro™ will get crinkled when it's run over the bar and tightened. Put the backrest in the straight up position.

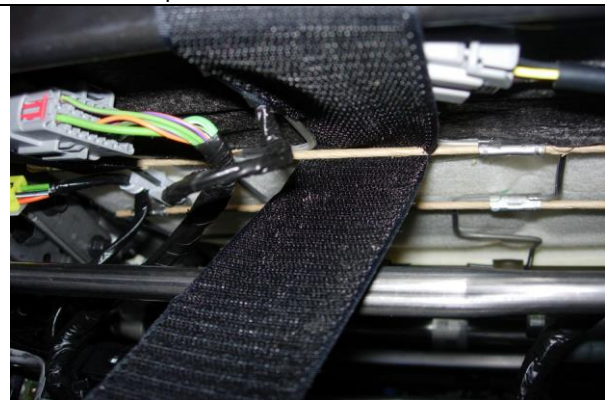

Step 14. Driver & Passenger Top/DT&PT:
View from under the back of the seats. Feed the center Velcro™ over the metal rod that the plastic clips hook up to. This Velcro™ will be flat when routed over the bar. From behind the seat, pull the material of the seat cover down towards the floor to tighten the front side, holding the top cover tight to the bottom cover, then take up the slack in the Velcro™ and press it to the 2" X 3" loop Velcro™ sewn inside the seat cover.



Step 15. Driver & Passenger Top/DT&PT:

Re-connect the plastic clips under the seat. Center the backside of the seat cover, pull down and press the hook Velcro™ sewn on the seat cover to the fuzzy carpet on the back of the seat.



Step 16. Middle Bottom Back/MBB:

Lift the middle bottom up and place the loop Velcro™ into the cavity of the middle bottom. Prepare the surface of the plastic with rubbing alcohol. Press the adhesive hook Velcro™ to the inside of the plastic box.



Step 17. Middle Bottom Back/MBB:

Press the hook Velcro™ to the carpet on the back edge of the middle seat bottom by tucking behind the vent.



Step 18. Middle Bottom/MB:

Connect the Velcro™ to the carpet on the bottom of the seat and then the middle Velcro™ to each other.



Step 19. Console/C:

With the console in the up position, slide the console cover on and tuck it in on the bottom. Fold the console down, holding it in position with one hand. Note where the Velcro™ will lay inside the cavity. Fasten the right side and left side rear hook Velcro™ to the carpet behind the console hinge.



Step 20. Console/C:

Clean the surface with rubbing alcohol as in Step 17. Peel off the backing from the adhesive hook Velcro™ and stick them to the plastic on the inside of the console. If they are not sticking, stop and re-clean the areas. Keep truck at 68 degrees or warmer for at least 24 hrs if possible for best results.



Step 21. Lid/L:

Mate the Velcro™ under the console lid starting with the top or front. The photo doesn't show the improvement to the top to bottom Velcro™. Slide the bottom, or rear Velcro™ into the left and right side of the hinge, mating them to the corresponding Velcro™ in front.



Step 22. Headrests/H:

Slide the cover on with the extending hook Velcro™ to the front. Line up the seams, and mate the Velcro™ as shown.